

# POWERLOC® JOINTING SAND

Product No. 1150-47



**Sweep it.**




**Water it.**



**Lock it.**

**PowerLoc® Jointing Sand** is a polymer-modified graded sand for filling between interlocking pavers, brick, patio blocks and concrete slabs. Once **PowerLoc® Jointing Sand** is swept into the paver joints and dampened with a water mist it hardens, locking pavers into place.

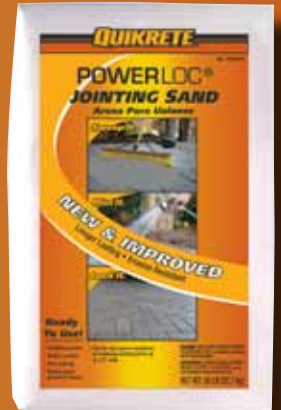

### PowerLoc® Jointing Sand Calculator

Square Feet (M <sup>2</sup> )	16 (1.5)	64 (5.9)	100 (9.2)	144 (13.3)	400 (36.9)
<b>1/8" (3 mm) thick</b> - # of 50 lb. (22.7 kg) bags	1	1	2	2	5
<b>1/4" (6 mm) thick</b> - # of 50 lb. (22.7 kg) bags	1	2	3	4	9
<b>3/8" (9 mm) thick</b> - # of 50 lb. (22.7 kg) bags	1	3	4	5	13
<b>1/2" (12 mm) thick</b> - # of 50 lb. (22.7 kg) bags	1	3	5	6	17

*\*Based on standard 2" x 4" x 8" (50 mm x 100 mm x 200 mm) brick. Usage will be different for other brick sizes. All yields are approximate and do not include allowance for waste, uneven joint width, etc.*

**PRODUCT USE:**

- Resists weed growth and insects
- Resists erosion
- Stabilizes pavers
- Non-staining
- Environmentally friendly
- Contains safe organic binder
- Use for new paver installation or replacing existing joints.
- Use for joints up to 1/2" wide.
- Self-mending formula

**NEW & IMPROVED**  
Longer Lasting • Erosion Resistant

Item No.	Package Size	Quantity	UPC
1150-47	50 lb (22.7 kg)	56 per pallet	0-39645-11502-2