

QUIKRETE

TOTAL PROGRAM



QUIKRETE
CEMENT & CONCRETE PRODUCTS

PROFIT MANUAL & PRODUCT GUIDE

www.quikrete.com

TABLE OF CONTENTS

■ REACHING YOUR CUSTOMER	4
■ SUPPORTING YOUR SALES TEAM	12
■ PROFESSIONAL & TECHNICAL SUPPORT....	15
■ NEW PRODUCTS	17
■ CONCRETE MIXES	19
■ MORTAR & MASONRY PRODUCTS	20
■ PORTLAND & MASONRY CEMENTS	22
■ CONCRETE REPAIR & WATERPROOFING	23
■ CRACK SEALERS & CAULKS	25
■ ADVANCED POLYMER SEALANTS & ADHESIVES	26
■ EPOXY ANCHORING & EPOXY CONCRETE REPAIR	27
■ SURFACE PREPARATION & CLEANERS	28
■ SEALERS & ADDITIVES	29
■ CONSTRUCTION & RESTORATION PRODUCTS	31
■ DOT REPAIR MATERIALS	33
■ UNDERLAYMENTS & THINSETS	34
■ STUCCO PRODUCTS	35
■ SANDS & AGGREGATES	37
■ HARDSCAPES by QUIKRETE®	39
■ BLACKTOP PRODUCTS	40
■ CONCRETE ACCESSORIES	41
■ WINTER PRODUCTS	42



A construction worker wearing a bright green t-shirt and dark, worn-in denim jeans is leaning over a wooden formwork structure. The worker is positioned on the left side of the frame, with their back to the camera. In the foreground, several parallel steel rebar rods are visible, extending across the bottom of the image. The background shows a blurred construction site with various materials, including stacks of lumber and a concrete mixer truck, under an overcast sky. The overall scene conveys a sense of active construction and manual labor.

QUALITY.
CONSISTENCY.
PERFORMANCE.

THE QUIKRETE® COMPANIES STORY

On May 22, 1940, The QUIKRETE® Companies was born in Columbus, Ohio. Founded on the ingenuity and vision of former aeronautical engineer Gene Winchester, The QUIKRETE® Companies transformed the building, repair and home improvement industries with the introduction of Gemaco QUIKRETE® packaged concrete in 1951. This revolutionary concrete material replaced tedious multi-part mixing with a pre-blended material that only required water, which vastly improved jobsite efficiency, consistency and quality.

In the early 1980s, The QUIKRETE® Companies relocated its headquarters to Atlanta under the leadership of Winchester's sons, Jim, Jack and Dennis. During the next three decades, The QUIKRETE® Companies strengthened its product portfolio and expanded nationally to meet the growing needs of its customers. By establishing an unmatched line of innovative building, repair and home improvement products that can be delivered anywhere in North America within 24 hours or less, The QUIKRETE® Companies is the unquestioned concrete industry leader.

Today, The QUIKRETE® Companies is much more than an unmistakable yellow bag of concrete. It diversified into related construction categories with the additions of companies like Pavestone®, Custom Building Products, Keystone Hardscapes®, Best Block, Contech® Engineered Solutions, Spec Mix®, Rinker Materials™, QPR® Target Technologies® and Daubois®. As a result, The QUIKRETE® Companies and its network of 250 facilities now serves as a single-source resource for the home improvement, residential, commercial, industrial, transportation and infrastructure industries.



THE QUIKRETE® COMPANIES



REACHING YOUR CUSTOMER

The **QUIKRETE® Company** continues to reinforce and grow its market leadership position with a comprehensive advertising and public relations program. In fact, The **QUIKRETE®** brand will reach **more than 66% of your customers** over three times, generating more than **2,000,000,000** impressions during the selling season.


The **QUIKRETE® Company** utilizes home improvement, general interest and sports-oriented cable television, video streaming, nationally syndicated radio, magazines, online advertising and social media to inspire your customers with concrete project ideas and drive product trial.

The **QUIKRETE® Company** sponsors and conducts ongoing consumer and professional research to determine brand awareness, project sources of inspiration and instruction, purchasing patterns, industry trends and identify future consumer project plans.

ONLINE ADVERTISING

Research shows that **80% of consumers use the Internet for various home improvement needs (86% of users gathered product information, 62% searched for project ideas).**

The **QUIKRETE® Company's** vast online consumer advertising presence includes YouTube.com, HGTV.com, Weatherbug.com, BobVilla.com, Homemade-Modern.com, TheMoneyPit.com, Todayshomeowner.com, ThisOldHouse.com, DIY.com and Weather.com. Banner ads and native content drive homeowners to the **QUIKRETE.com** website for how-to project videos, project ideas and the product information they need.

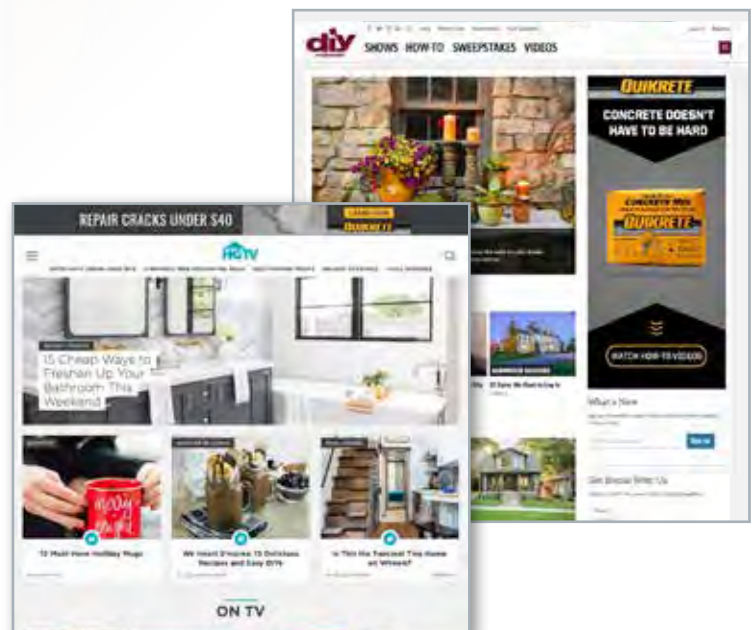

“Banner Ads and Online Advertising Drive Customers to the QUIKRETE.com website”

NATIONAL TELEVISION

HOME IMPROVEMENT



95.6 million HH



60.9 million HH



85 million HH
(Syndicated)



PBS: 40 million HH
250 Syndicated TV Stations

GENERAL INTEREST



SPORTS



83.02 million HH



79 million HH



84.5 million HH



NATIONAL RADIO

Millions of listeners are inspired and educated by **QUIKRETE®** for home improvement projects by home improvement radio shows. National syndicated radio shows regularly promote and endorse **QUIKRETE®** on their websites and social media networks.



Weekly on 117 stations
plus online streaming stations



Weekly on 280 stations,
XM Radio & Podcast



Weekly on 262 stations, XM
Radio stations & a Podcast



115 stations

PRINT ADVERTISING

TRADE PRINT

Concrete and Masonry Professionals

Total Circulation: over 300,000

- Masonry Magazine
- Concrete Construction
- Concrete Contractor
- Concrete Repair Bulletin
- Roads & Bridges
- Shotcrete
- Walls & Ceilings
- On-Site (Canada)



Builders and Remodelers

Total Circulation: over 1,200,000

- Builder
- Professional Builder
- Professional Remodeler



Architects and Engineers

Total Circulation: nearly 30,000

- The Construction Specifier




QUIKRETE.com is the premier resource for homeowners & construction professionals for product and project information. The mobile optimized site delivers product and project information at home, in the office, on the jobsite and in the aisle.

FOR HOMEOWNERS:

The “**For Homeowners**” path provides concrete, masonry and stucco project ideas, product selection information and step by-step instructions for the homeowner. Affordable homeowner projects and new products are featured monthly.

FOR THE PRO:

Our “**For The Pro**” path offers concrete and masonry, stucco, road and bridge contractors, along with design professionals the information they need for their commercial, residential and municipal projects: including product performance data, SDS information and guide specifications.

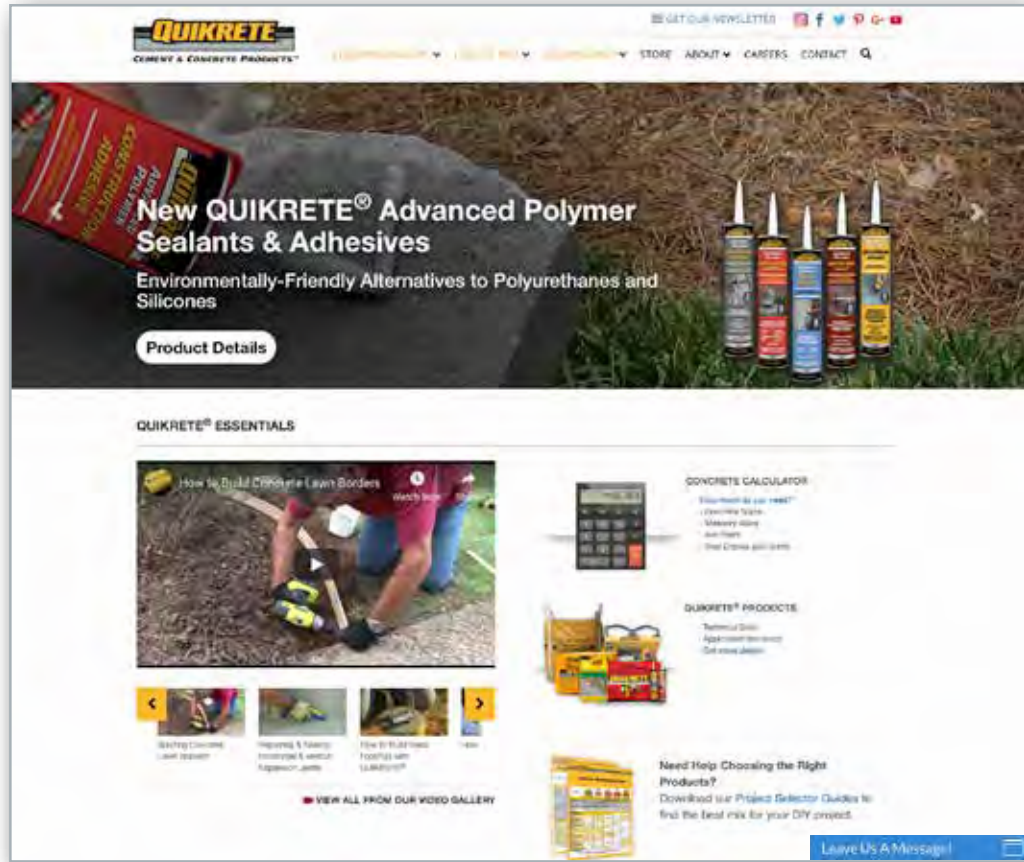


Homepage slides focus on key products and project features for professionals and homeowners' alike.



LIVE CHAT

QUIKChat is a live website engagement tool that provides thorough, real-time response to customer inquiries. Accessible 24-hours a day, seven-days a week on www.QUIKRETE.com, QUIKChat connects customers with trained professionals, known as agents, who answer their specific product and project questions. According to the live-chat service provider, 8 out of 10 customer inquiries are resolved during the initial interaction with an agent.

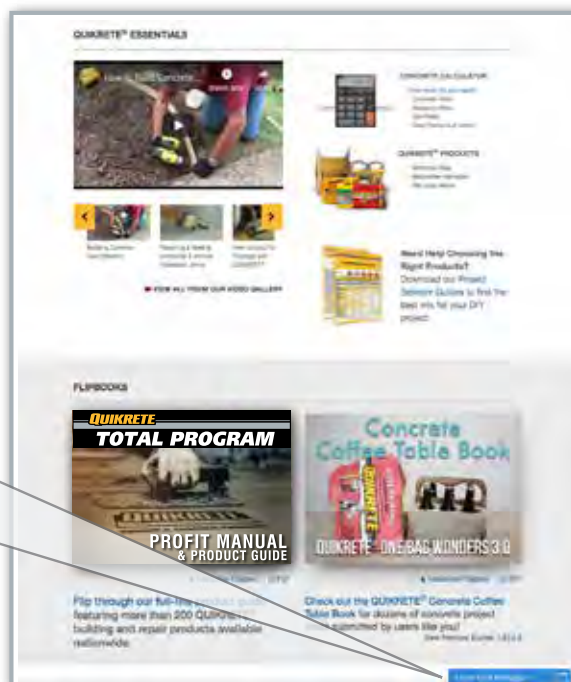

- NEW HOMEPAGE FEATURES:**
- Live Social Media
 - News Feeds
 - Featured Home Improvement Projects
 - Commercial Project Spotlight
 - Live Chat

The **QUIKRETE.com - DEALERS ONLY Site** is a password-protected path that gives our customers exclusive online access to product and project images, advertising guidelines and copy points, scannable UPC guides and an extensive library of training modules.

Contact Your **QUIKRETE.com** Sales Representative for Your User ID and Password.


Dealer's Only Resources

- **Ad Builder** - Images, Logos, Radio Spots and Advertising Copy Points
- **In-Store Merchandising** - In-Store Displays, Banners, Beam Signs and Signage
- **Sales Literature** - Brochures, Sell Sheets and Tear Pad Sheets
- **Employee Training Modules** - Training Units and Aids for a Variety of Best-Selling Products

MAKE PAYMENTS ONLINE



PASSWORD-PROTECTED DEALER LOGIN

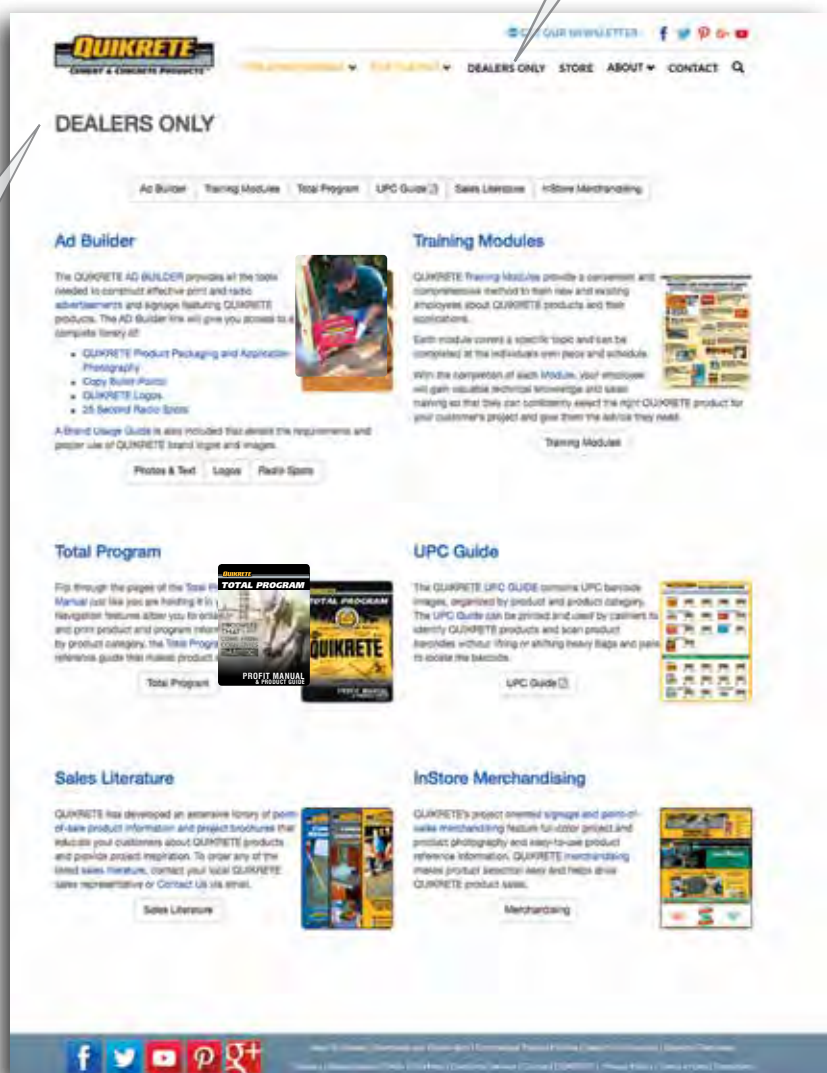

AD BUILDER PROVIDES DOWNLOADABLE RESOURCES SUCH AS:

- **Package and Application Photography**
- **High Resolution Logos**
- **Ad Copy Bullet Points**

A survey by the Home Projects Council, a collection of reputable home improvement experts, identified how-to videos as the leading resource for home improvement project education and instruction. Understanding that trend, **The QUIKRETE® Company** has established a how-to video gallery to inspire project ideas and instill project confidence.



HOW-TO PROJECT VIDEOS

- Over **50 How-To Project Videos**
- More than **1.2 Million Hours Viewed**
- Video Views Are A Key Indicator of Project Interest

TOP QUIKRETE.COM PROJECT VIDEOS


1. How To Pour And Finish Concrete
2. How To Set Posts in Concrete without Mixing
3. How To Repair Concrete Cracks
4. How To Build a Lawn Border
5. How To Hand Mix Concrete
6. How To Make Thin Repairs To Damaged Concrete
7. How To Resurface Concrete
8. How To Build Deck Footings
9. How To Build A Block Wall
10. How To Repair Cracks and Holes in Stucco

ALSO VIEWABLE ON MOBILE DEVICES

Customers can easily access video content using their mobile phone or tablet as well as by visiting the desktop site.



Social media provides a forum for open dialogue between **QUIKRETE®** and DIYers, who are also sharing their experiences and ideas with each other. **QUIKRETE®** is inspiring home improvement projects by customizing the content to fit the conversations taking place on each specific social media platform.

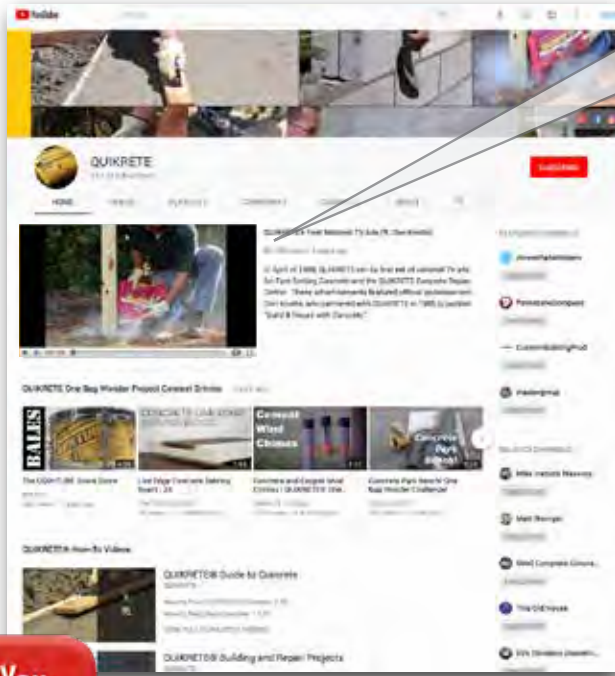

YOUTUBE

- More Than **60 Million Views** of Instructional How-To Project Videos
- Over **2.5 Million Hours** of Product Application Training



TOP 10 YOUTUBE VIDEOS

1. How To Pour and Finish Concrete
2. How To Set Posts in Concrete
3. How To Build Deck Footings
4. How To Resurface Concrete
5. How To Build a Lawn Border
6. How To Repair Concrete Cracks
7. How To Install Stucco
8. How To Build a Block Wall
9. How to Install Veneer Stone
10. How To Build a Block Wall Without Mortar




TWITTER

- Posts Featuring **#QUIKRETE**, Link the Brand to Project Success

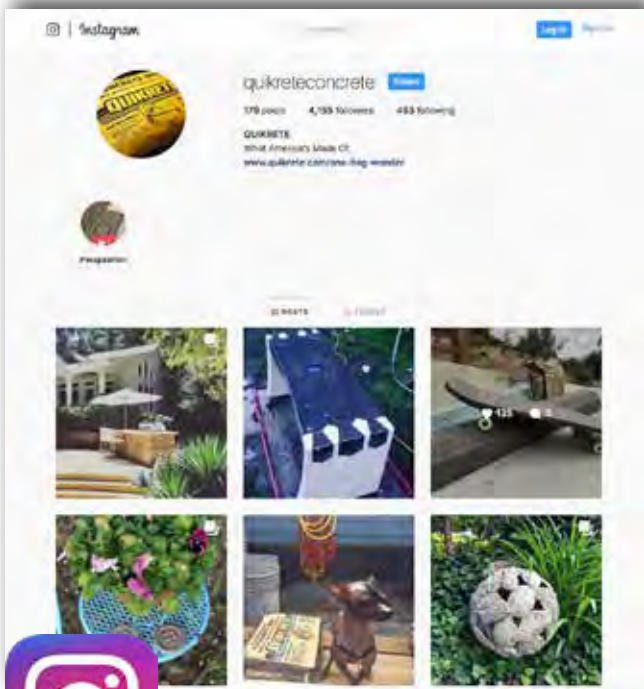

INSTAGRAM


- Project Focused Content Creates a Forum for Fan Discussion and Community Engagement

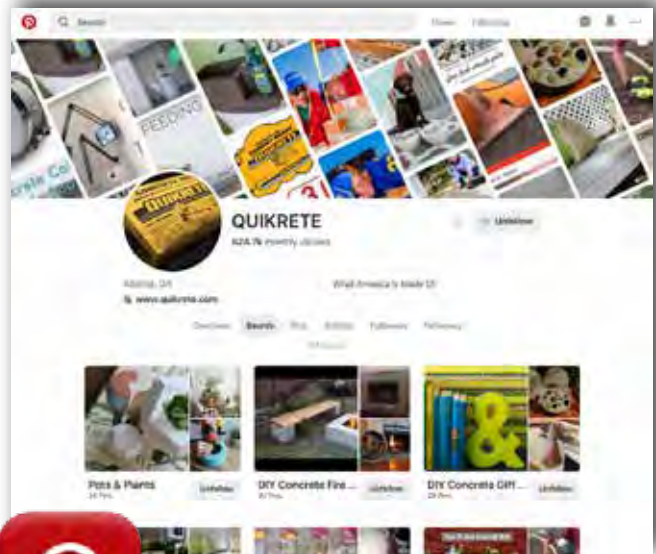

PINTEREST

- Content Focused on Concrete Design and Décor Projects

Consumers spend nearly 20% of their time online on social media, with the majority being allotted to Facebook. With this in mind, **The QUIKRETE® Company** instituted an integrated, promotional campaign called the **QUIKRETE® One Bag Wonder Contest**.

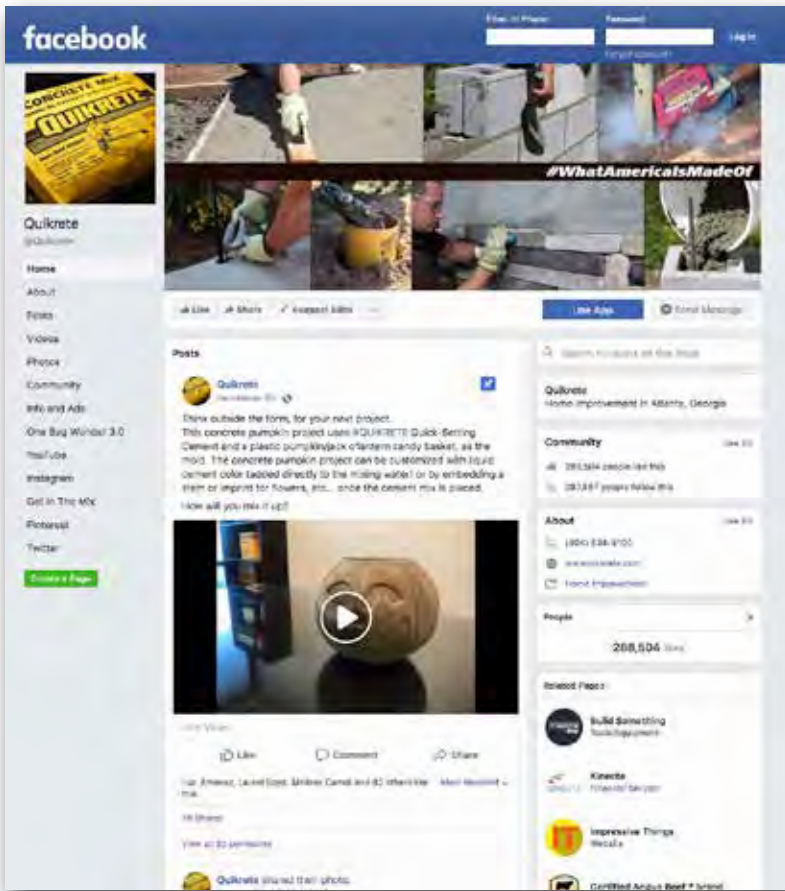

QUIKRETE® challenged fans and entrants to create a project, using just one bag of **QUIKRETE®**



QUIKRETE® created the **Concrete Coffee Table Book** to showcase over 60 project entries



FACEBOOK

- Over **290,000 Fans** Sharing Projects Through Photos and Videos

BUILDING COMMUNITY

QUIKRETE® directly works with bloggers, influencers and media channels to develop and inspire project ideas, supporting these relationships with project advice, encouraging community development, sharing product expertise and other resources. This community-driven project development has led to notable inclusion in project round up posts from such sources as BuzzFeed's Nifty Channel. One particular video – a concrete hedgehog boot brush – reached over 26 million viewers.




On average, consumers spend more than 105 hours per month on their phones. Understanding this growing trend, **The QUIKRETE® Company** launched an intuitive mobile app that serves as a comprehensive resource for building, repair and home improvement projects. Built for use on iPhone, iPads and Android devices, the **QUIKRETE®** mobile app features useful interactive tools for successfully completing a project. Over **40,000 Downloads**.



WHEN YOU KNOW MORE...YOU SELL MORE

INTERACTIVE TOOLS

- QR Code & Bar Code Scanner for Product Information
- Product Search with Downloadable Technical Data
- Product Descriptions, Package Sizes and Uses
- Project Ideas for Indoor & Outdoor Projects
- How-To Project Videos with Step-By-Step Instructions (Tools & Materials List Included)
- Quantity Calculator to Determine Amount of Product Needed for Project
- QuikShare for Posting Project Videos
- Store Locator Based on Real-Time Geo Locating

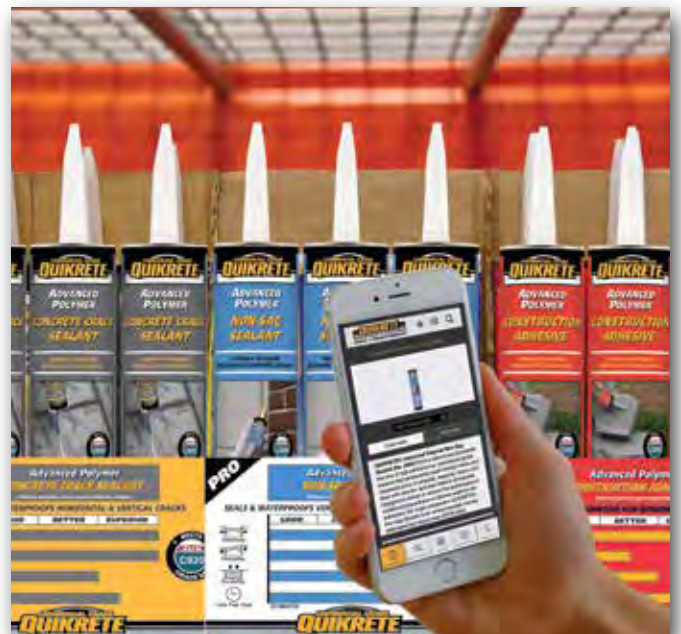

SUPPORTING YOUR SALES TEAM

The **QUIKRETE®** Company takes a Total Program marketing approach to customer support. **QUIKRETE®** sales representatives work directly with each retailer to develop and implement a comprehensive and fully integrated marketing program. This “Total Program” is designed to engage and influence customers during all phases of the decision-making process, from inspiration to education to purchase. **QUIKRETE®** is committed to providing the right product mix and marketing support to drive concrete product sales.

PROFESSIONAL SALES REPRESENTATIVES

The **QUIKRETE®** Company’s fleet of over 600 sales, merchandising and customer service representatives provide support before, during and after the sale.


- Product Knowledge and Sales Associate Training
- Consumer Clinics
- Technical Support
- Order Facilitation
- Contractor Demos
- Merchandising Support




SUPPORTING YOUR SALES TEAM

ONLINE TRAINING MODULES

Customized training modules help sales teams establish a baseline of knowledge on the full range of **QUIKRETE®** products, to better educate the customer in their decision making process. Learning about the full range of products that **QUIKRETE®** offers can, in turn, help sales staff aid customers in selecting the right mix of products for a successful project.

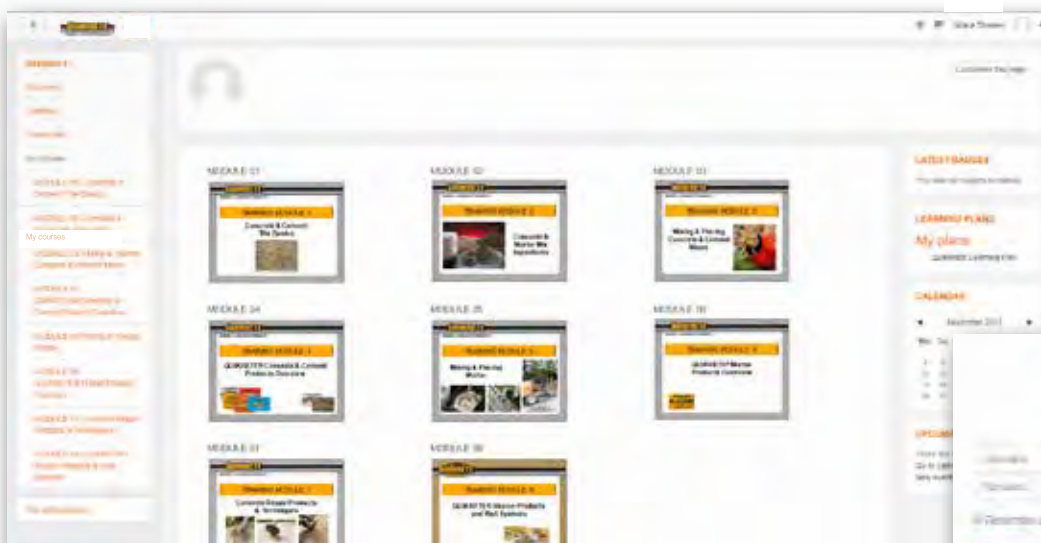

“THE MORE YOU KNOW... THE MORE YOU SELL”

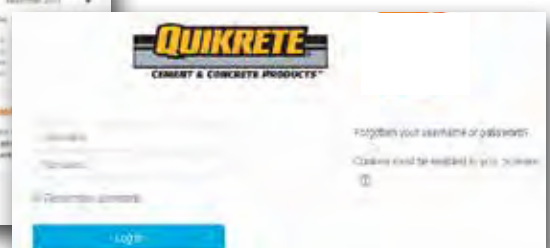



REPAIR PRODUCT BAYS

- Organized Display Categorizes Product
- Overhead Signage Gives Product Overviews
- Improves Shopping Experience
- Product Mix is Customized by Account

TEAR PADS & BROCHURES

- Project Oriented
- Step-by-Step Instructions
- Tools and Materials Needed Sections
- Bilingual

SUPPORTING YOUR SALES TEAM




BANNERS & OVERHEAD SIGNS

- Product Selection Guidance
- Provides Project Inspiration
- Directs Customer Traffic Flow

STORE DISPLAYS & MINI PALLETS

- Increase Impulse Purchases
- Feature New Products



NEW DISPLAY CASES & BIN TAGS

- Product Descriptions
- Quantity Calculators
- Bilingual
- Application Photography
- Feature / Performance Icons

FULL COLOR GRAPHIC PACKAGING

- Application Images Aid in Product Selection
- New Commercial Grade **QUIKRETE®** Packaging

The positive third-party endorsement of media has always been a cornerstone of the **QUIKRETE®** marketing program and that remains true today, as evidenced by the more than **1 billion editorial impressions** generated through television, radio, trade and consumer magazines, and newspaper coverage annually. **QUIKRETE®** deploys a variety of tactics to secure media coverage annually including how-to project press releases, commercial project profiles, product announcements, company news, trade show briefings, media tours, by-lined articles, and seasonal pitches.



SUPPORTING YOUR SALES TEAM

QUIKNEWS & IN THE MIX



The **QUIKRETE®** Company engages homeowners and contractors directly through electronic newsletters promoting the latest products, projects and trends.

QUIKNEWS

Inspires homeowners with project ideas and how-to videos.

IN THE MIX

Designed to inform and educate contractors with commercial project profiles and best-practices.

Both newsletters are driven to reinforce **QUIKRETE®** as the concrete building and repair resource.



PROFESSIONAL & TECHNICAL SUPPORT

According to the Professional Tracking Study conducted by The Farnsworth Group, nearly all professionals (99%) recognize the **QUIKRETE®** brand and name, and 81% reported purchasing, recommending or specifying **QUIKRETE®** products.

The **QUIKRETE®** Company continues to educate and reinforce with professionals the breadth and performance of our Commercial Grade product line through targeted print advertising, direct mail, trade show demonstrations and one on one relationships.

QUIKRETE® Commercial Grade Products are specifically formulated to meet job-site applications requirements, such as working time, compressive strength and flexural strength, bond strength, workability and consistency.


TECHNICAL DATA

The **QUIKRETE®** Company's Technical and Marketing Team provides technical data support to ensure that contractors and design professionals can specify and source exactly what they need for any size and type of construction, remodeling and municipal project.

CONSTRUCTION PRODUCTS GUIDE



- Organized by CSI Division
- Includes Product Performance Data, Yields & Coverage, Mixing & Application Instructions
- Technical Specifications
- **Updated 8th Edition**

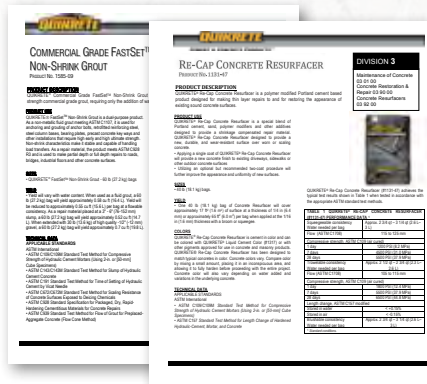

TECHNICAL DATA SHEETS

- Product Performance
- Application & Mixing Instructions
- Yields & Coverage
- Technical Specifications

POINT-OF-SALE LITERATURE



PROJECT PROFILES

- Hundreds of Case Studies
- Product Applications
- Products & Quantities Used
- Project Photos
- Project Details



NEW! TECHNICAL DATA THUMB DRIVE

- Guide Specifications
- Technical Data Sheets
- MSDS
- Project Profiles
- Application Videos

PRODUCT LITERATURE

- Concrete Mix Selector Guide
- FastSet™ Product Selector Guide
- Mason Mix & Mortar Selector Guide
- Stucco Product Selector Guide
- Advanced Polymer Product Guide

ADVANCED POLYMER SEALANTS VS. POLYURETHANE SEALANTS PERFORMANCE COMPARISON

ADVANCED POLYMER SEALANTS	CHARACTERISTICS	POLYURETHANE SEALANTS
10	Shake Time (1/2" / 1")	10
10	Non-Bubbling	7
10	Emulsification	8
10	Adhesion to Substrate	8
10	Cure Time	1/16 inch Per 24 Hours (21°F)
10	Low Temperature	8
10	Flexibility	10
10	Adhesion to Substrate	8
10	Shrinkage	8
10	Weather Resistance	8
10	Specific Gravity	1.00 (20°C / 68°F)

TECHNICAL CENTER

The **QUIKRETE®** Company continues to be an industry leader in new product research and innovation, committed to developing new products to meet the evolving needs of the homeowner and professional user.

The **QUIKRETE®** Technical Center also routinely evaluates production samples to assure that all products meet or exceed ASTM standards and provide consistent quality throughout our more than 100 production facilities serving the United States, Puerto Rico, Canada, Central and South America.

WE'RE HERE TO HELP YOU 24/7

The **QUIKRETE®** Help Center is available to provide technical support to your contractors and consumers 24/7 at (800) 282-5828.



TRADE SHOWS

The **QUIKRETE®** Company exhibits at and attends more than 100 national and regional trade shows annually. These shows provide **QUIKRETE®** the opportunity to promote and demonstrate new products and strengthen our position with contractors, architects, engineers and municipalities.

WORLD OF CONCRETE

- Attendance: 60,000 Concrete and Masonry Professionals
- Conducted Product Demonstrations Viewed by More Than 2,000 Attendees

INTERNATIONAL BUILDERS SHOW

- Attendance: 75,000 Home Builders, Construction Professionals, Architects and Designers
- Conducted Product Demonstrations Viewed by Approximately 2,000 Attendees



NEW!

RE•CAP™ CONCRETE RESURFACER



QUIKRETE® Re•Cap™ Concrete Resurfacer is a special blend of portland cement, sand, polymer modifiers and other additives designed to provide a shrinkage compensated repair material for making thin repairs to sound concrete which is in need of surface renewal. **QUIKRETE® Re•Cap™ Concrete Resurfacer** provides a beautiful, durable, wear-resistant surface designed to withstand heavy foot and vehicle traffic. (Page 21)

Use For Repairing:

- Sidewalks
- Concrete Floors
- Curbs
- Patio
- Driveways
- Floors
- Pool Decks
- Parking Decks



NEW WEATHER BARRIER BAG

4x Stronger Bond!

NEW!

ADVANCED POLYMER SEALANTS & ADHESIVES



QUIKRETE® Advanced Polymer Adhesives are a solvent and isocyanate free line of high-performance, commercial-grade flexible repair and bonding materials that meet ASTM C920 standards. Designed to deliver or exceed the performance of traditional polyurethane or silicone sealants and adhesives, the single-component **Advanced Polymer Adhesives** are environmentally-friendly alternatives. Available in 10-ounce tubes. (Page 24)

- Self-Leveling Sealant
- Construction Adhesive
- Mortar Joint Sealant
- Non-Sag Sealant
- Concrete Crack Sealant

Superior Performance vs. Polyurethane Sealants

NEW!

LIGHTWEIGHT STUCCO



QUIKRETE® Lightweight Fiberglass Reinforced Stucco (FRS) is a Portland cement-based plaster blended with recycled, synthetic particles of Expanded Polystyrene (EPS), uniformly graded sand, and alkali-resistant glass fibers. The static-free EPS particles improve flexibility, durability, hydration and crack resistance while reducing overall cured product weight by 35%. **Lightweight Fiberglass Reinforced Stucco (FRS)** is one-hour fire rated and meets applicable IAPMO and ASTM standards. (Page 33)

Use For:

- Repairing Cracks & Holes in Stucco Walls
- Around Replacement Windows & Doors
- Interior & exterior Applications

35% Lighter

NEW!

POLYMER MODIFIED STRUCTURAL REPAIR



Polymer modified and shrinkage-compensated, rapid setting, high strength repair material designed for vertical & horizontal structural concrete repairs. The material can be extended with up to 10 lb (4.5 kg) of gravel. **QUIKRETE® Polymer Modified Structural Repair** can be used for full-depth and partial-depth repairs and can be sculpted to match the contours of the existing concrete surfaces. 20 to 45 minute set time. Exceeds 2500 PSI (17.2 MPa) in 3 hours. (Page 22)

Use For:

- Driveways
- Ramps
- Sidewalks
- Floors
- Bridge Decks
- Parking Garages

One Product... Hundreds of Repair Projects

Exceeds the requirements of ASTM C 928 R2

PRODUCT GUIDE



CONCRETE MIX

Original 4000 PSI average compressive strength blend of Portland cement, sand, gravel or stone, and other approved ingredients. Just add water.

Use For:

- Floors
- Footings
- Steps
- Sidewalks
- Patios
- Curbs
- Setting Posts

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity	UPC
1101-10	10 lb bag	4.5 kg	6/bale	0-39645-11011-9
1101-40	40 lb bag	18.1 kg	80/pallet	0-39645-11014-0
1101-60	60 lb bag	27.2 kg	56/pallet	0-39645-11016-4
1101-80	80 lb bag	36.2 kg	42/pallet	0-39645-11018-8

** 90 lb. bags available regionally.*



FAST-SETTING CONCRETE MIX

A special blend of fast-setting cements, sand and gravel designed to set hard in approximately 20 to 40 minutes. Use for building and setting posts. Sets posts without mixing. Pour dry mix into hole and soak with water.

Use For Setting:

- Fence posts
- Mailbox posts
- Swing sets

Use For Building:

- Steps
- Sidewalks
- Air conditioner pads

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity	UPC
1004-50	50 lb bag	22.6 kg	64/pallet	0-39645-10045-5



QUIKRETE® 5000 CONCRETE MIX

Commercial Grade concrete mix designed for higher-early strength gain. Achieves 2500 PSI in 3 days and 5000 PSI in 28 days. Ideal for cold weather application.

Use For:

- Concrete projects 2 in thick or more that require high strength
- Driveway aprons
- Sign footings
- Patios
- Deck supports
- Curbs
- Floors

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity	UPC
1007-01	60 lb bag	27.2 kg	56/pallet	0-39645-10076-9
1007-00	80 lb bag	36.2 kg	42/pallet	0-39645-10078-3



Q-MAX™ PRO CONCRETE MIX

Fiber reinforced, rapid hardening concrete formulated to provide a 1-hour working time, a walk-on time of 3 hours, and achieve a compressive strength of 6500 PSI. The mix provides superior workability and finishing characteristics and resists drying shrinkage cracks. Air entrained for improved freeze-thaw durability and contains a corrosion inhibitor to protect reinforced steel.

Use For:

- Floors
- Patios
- Slabs
- Footings
- Columns
- Sidewalks
- Columns
- Steps
- Ramps
- Walls
- Patios

Item No.	Package Size	Metric	Quantity	UPC
1004-81	80 lb bag	36.2 kg	42/pallet	0-39645-10039-4



CRACK RESISTANT CONCRETE MIX

Commercial Grade concrete mix with air entraining admixture, and alkali-resistant reinforcing fibers. Formula significantly reduces cracking from drying shrinkage and is designed for use in structural concrete applications. Achieves 4000 PSI in 28 days.

Other Benefits & Features Include:

- Superior workability
- Provides greater impact resistance
- Air entrained for improved freeze-thaw durability
- Eliminates the need for wire mesh in typical slab-on-grade slabs

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity	UPC
1006-67	60 lb bag	27.2 kg	56/pallet	0-39645-10061-5
1006-80	80 lb bag	36.2 kg	42/pallet	0-39645-10068-4



COUNTERTOP MIX

A specially formulated flowable high strength concrete mix for use in pre-cast and cast-in-place concrete countertop applications. Available in Gray & Tint-Base White.

Other Benefits and Features Include:

- High flow formula minimizes the need for mechanical vibration
- Reduced shrinkage formulation
- Strip forms in 18 hours
- Exceeds 2500 PSI (17.7 MPa) at 3 days
- Exceeds 3500 PSI (24.1 MPa) at 7 days
- Exceeds 5000 PSI (34.5 MPa) at 28 days

Item No.	Package Size	Metric	Quantity	UPC
Gray	80 lb bag	36.2 kg	42/pallet	039645-11067-6
Tint Base White	80 lb bag	36.2 kg	42/pallet	039645-11069-0

QUIKRETE® Timeline: 1940-2018

May 22, 1940 Maintenance Products, Inc Founded



1940



1st Plant

November 1950 Gene Winchester Appointed as General Manager of Maintenance Products Inc.



April 1951 Produces first **QUIKRETE®** branded product: Gemaco **QUIKRETE®**





MORTAR MIX

A blend of masonry cement and graded sand. Just add water.
Use for non structural construction & repair of brick, block and stone:

- Barbecues
- Pillars
- Planters
- Non-structural walls
- Tuck pointing mortar
- Veneers

Meets the requirements of ASTM C 270 & C 1714 for Type N Mortar

Item No.	Package Size	Metric	Quantity	UPC
1102-10	10 lb bag	4.5 kg	6/bale	0-39645-11021-8
1102-40	40 lb bag	18.1 kg	80/pallet	0-39645-11024-9
1102-60	60 lb bag	27.2 kg	56/pallet	0-39645-11026-3
1102-80	80 lb bag	36.2 kg	42/pallet	0-39645-11028-7



MASON MIX

High-strength, contractor grade, pre-blended mortar mix. Mason Mix contains properly graded masonry sand and requires only the addition of water.

Use For Structural & Non-Structural Masonry Applications Above and Below Grade:

- Walls
- Brick/stone veneers
- Columns
- Tuck pointing

Meets the requirements of ASTM C 270 & C 1714

* Also available in 3000 lb. bulk bags

Item No.	Package Size	Metric	Quantity	UPC
Type S				
1136-00	60 lb bag	27.2 kg	56/pallet	0-39645-11366-0
1136-80	80 lb bag	36.2 kg	42/pallet	0-39645-11368-4
Type N				
1136-86	80 lb bag	36.2 kg	42/pallet	0-39645-11356-1
Type M				
1136-85	80 lb bag	36.2 kg	42/pallet	0-39645-11358-5



MASON MIX - COLORED FORMULA

High-strength, contractor grade, pre-blended mortar mix. Colored Mason Mix contains properly graded masonry sand and color pigment.

Use For Structural Masonry Applications Above and Below Grade:

- Walls
- Brick/stone veneers
- Columns
- Tuck pointing

• Also available in Type "N" and "M" formulations

Meets the requirements of ASTM C 270 & C 1714

* Contact your local representative for exact color availability.

* Also available in 3000 lb. bulk bags

Item No.	Package Size	Metric	Quantity	UPC
Type S				
1136-71	80 lb bag	36.2 kg	42/pallet	0-39645-11367-7
Type N				
1136-72	80 lb bag	36.2 kg	42/pallet	0-39645-11365-3



GLASS BLOCK MORTAR

Specifically formulated blend of white sand, white cement, hydrated lime and waterproofing additives. Just add water.

Use For:

- Laying glass block for interior and exterior walls
- Laying brick, block or tile where white mortar is desired

Meets the requirements of ASTM C 270 & C 1714 for Type S Mortar

Item No.	Package Size	Metric	Quantity	UPC
1610-00	50 lb bag	22.6 kg	63/pallet	0-39645-16105-0



VENEER STONE MORTARS

A Portland cement and hydrated lime based mortar designed for veneer applications and tuck pointing of manufactured and natural stone.

Also available in Polymer-Modified and Natural Stone formulas.

- Apply directly to concrete and masonry surfaces or over expanded metal lath
- Superior bond strength
- Consistent, pre-blended mix

Meets the requirements of ASTM C 270 & C 1714

* Also available in 3000 lb. bulk bags

* Veneer Stone - Natural Stone Available Regionally

Item No.	Package Size	Metric	Quantity	UPC
1137-80	80 lb bag	36.2 kg	42/pallet	0-39645-11378-3
Poly-Mod				
1137-85	80 lb bag	36.2 kg	42/pallet	0-39645-11377-6
Natural Stone				
1137-88	80 lb bag	36.2 kg	42/pallet	0-39645-11379-0

August 1954 QUIKRETE® receives US trademark registration



July 1958 Built new **QUIKRETE®** Plant in Columbus, OH



January 1959 Introduces **QUIKRETE®** Vinyl Concrete Patcher





ROOF TILE MORTAR FL-15

Contractor grade, high bond strength mortar.

Use For:

- Setting flat and low profile clay, cement and other roof tile
- Roofs up to 15 feet high

Meets the requirements of ASTM C 270 for Type M Mortar

* Roof Tile Mortar FL-15 Available Regionally

Item No.	Package Size	Metric	Quantity	UPC
1140-80	80 lb bag	36.2 kg	42/pallet	0-39645-11408-7



CORE-FILL GROUTS

A properly proportioned mixture of Portland cement, graded aggregate, and other ingredients designed to provide a flowable grout, requiring only the addition of water. Available in Fine and Coarse.

Use For:

- Filling masonry block cores
- Pumped or poured applications
- Use Fine Core-Fill Grout when grout space is less than 4 inches in either direction
- Use Coarse Core-Fill Grout when grout space is greater than 4 inches in either direction

Meets the strength requirements of ASTM C 476

Item No.	Package Size	Metric	Quantity	UPC
Coarse 1585-07	80 lb bag	36.2 kg	42/pallet	0-39645-15853-1
Fine 1585-08	80 lb bag	36.2 kg	42/pallet	0-39645-15854-8



SELF-CONSOLIDATING CORE-FILL GROUT

A Portland cement based highly fluid grout specifically designed to fill masonry block cores without segregation.

Other benefits & features include:

- Eliminates the need for vibrating.
- Can be placed in single lifts up to 12 ft 8 in high
- Contains 3/8 in (9.5 mm) aggregate.
- For use when grout space is greater than 4 in (100 mm) in both directions.

Meets the requirements of ASTM C 476 at 24-28 in. (600-700 mm) slump flow

Item No.	Package Size	Metric	Quantity	UPC
1585-06	80 lb bag	36.2 kg	42/pallet	0-39645-15857-9




January 1965
Company legally changes name to
The **QUIKRETE**® Company

June 1967 Atlanta
QUIKRETE®
Plant begins production



April 1968 Publishes
Do-It-Yourself With Packaged
Concrete And Mortar Guide





PORTLAND CEMENT

Mixed with aggregate and other ingredients to make concrete mix, mortar mix and base coat stucco. Available in Type I, Type I/II, Type II and Type III.

- To make Concrete Mix:
- 1 Part Portland Cement (by volume)
 - 2 Parts All-Purpose Sand
 - 3 Parts Gravel
- To make Type S Mortar Mix:
- 1 Part Portland Cement (by volume)
 - ½ Part Hydrated Lime
 - 3½ to 4½ Parts Masonry Sand

Meets the requirements of ASTM C 150 and Federal Specifications for Portland cement.

Item No.	Package Size	Metric	Quantity	UPC
1124-31	31 lb bag	14.1 kg	100/pallet	0-39645-11231-1
1124-47	47 lb bag	21.3 kg	63/pallet	0-39645-11244-1
1124-94	94 lb bag	42.6 kg	35/pallet	0-39645-11249-6
1124-42	92.6 lb bag	42 kg	35/pallet	0-39645-11421-6



MASONRY CEMENT

Available in Type N and Type S masonry cement.

- To make Type N Mortar Mix:
- 1 Part Type N Masonry Cement (by volume)
 - 3 Parts Masonry Sand
- To make Type S Mortar Mix:
- 1 Part Type S Masonry Cement (by volume)
 - 3 Parts Masonry Sand

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity	UPC
Type S				
1125-71	70 lb bag	31.7 kg	40/pallet	0-39645-11251-9
Type N				
1125-70	70 lb bag	31.7 kg	40/pallet	0-39645-11257-1



PORTLAND-LIME CEMENT

Blend of Portland cement and hydrated lime meeting the Type S proportions.

Available Regionally.

- To make Type S Mortar Mix:
- 1 Part Portland-Lime Cement (by volume)
 - 2½ to 3 Parts Masonry Sand

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity	UPC
1125-21	70 lb bag	31.7 kg	40/pallet	0-39645-12521-2



PREMIUM PLASTERING CEMENT

Properly proportioned blend of Portland cement with air entraining and plasticized admixtures for use in base coat and finish coat mixes. Formulation provides improved workability, reduced shrinkage and low-sag characteristics. Available Regionally.

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity	UPC
1125-98	94 lb bag	42.6 kg	35/pallet	0-39645-11259-5



STUCCO CEMENT

Blended cement designed for use with plaster sand to make base coat stucco and finish coat stucco mixes.

Available Regionally.

- To make Base Coat Stucco Mix:
- 1 Part Stucco Cement (by volume)
 - 3 to 4 Parts Plaster Sand (ASTM C 897)

Meets the requirements of ASTM C 91

Item No.	Package Size	Metric	Quantity	UPC
1201-85	80 lb bag	36.2 kg	42/pallet	0-39645-12016-3



PLASTIC CEMENT

Blended cement specifically designed for use with plaster sand to make Base Coat Stucco.

Available Regionally.

- To make Scratch and Base Coat Stucco Mix:
- 1 Part Plastic Cement (by volume)
 - 3 to 4 Parts Plaster Sand

Meets the requirements of ASTM C 1328 Type M and S.


Item No.	Package Size	Metric	Quantity	UPC
2121-94	94 lb bag	42.6 kg	35/pallet	0-39645-21219-6

1972



10th Plant

September 1974
First national **QUIKRETE®** ad:
The Turnover Twins



February 1975
US Patent Office issues patent for
QUIKRETE® Mix Packer Machine



CONCRETE REPAIR & WATERPROOFING



RE-CAP CONCRETE RESURFACER

A special blend of portland cement, sand, polymer modifiers and other additives designed to provide a shrinkage compensated repair material for making thin repairs to sound concrete which is in need of surface renewal. Provides a beautiful, durable, wear-resistant surface designed to withstand heavy foot and vehicle traffic.

Use For:

- Sidewalks
- Pool decks
- Curbs
- Patios
- Driveways
- Floors
- Concrete floors
- Parking decks



SAND/TOPPING MIX

Consists of a uniformly blended mixture of Portland cement, graded sand and other approved ingredients.

Use For:

- Repairing and topping damaged concrete surfaces less than 2 inches thick
- As a base for laying flagstone and paving bricks



VINYL CONCRETE PATCHER

Multi-purpose concrete repair material with strong adhesive properties. Trowels to a feather edge of 1/16 in. Made of a special blend of exterior grade vinyl resin, fine sand, and Portland cement. Just add water. Available in gray and white.

Use For:

- Making smooth repairs to cracked or chipped concrete floors, sidewalks or steps



QUICK-SETTING CEMENT

Specially formulated to set in approximately 10 to 15 minutes. Can be molded or sculpted into place.

Use For:

- Making concrete repairs where rapid setting is required
- Ideal for repairing broken edges of concrete steps and curbs

Tested in Accordance with ASTM C 191

** 50 lb (22.6 kg) Quick Setting Cement Available Regionally*

Item No.	Package Size	Metric	Quantity	UPC
1131-47	40 lb bag	18.1 kg	64/pallet	0-39645-11320-2
1131-47	40 lb bag	18.1 kg	35/mini pallet	0-39645-11320-2

Item No.	Package Size	Metric	Quantity	UPC
1103-10	10 lb bag	4.5 kg	6/bale	0-39645-11031-7
1103-40	40 lb bag	18.1 kg	80/pallet	0-39645-11034-8
1103-60	60 lb bag	27.2 kg	56/pallet	0-39645-11036-2
1103-80	80 lb bag	36.2 kg	42/pallet	0-39645-11038-6

Item No.	Package Size	Metric	Quantity	UPC
1133-11	10 lb pail	4.5 kg	4/case	0-39645-11343-1
1133-20	20 lb pail	9.1 kg	60/pallet	0-39645-11332-5
1133-40	40 lb bag	18.1 kg	64/pallet	0-39645-11334-9
1133-40	40 lb bag	18.1 kg	35/mini pallet	0-39645-11334-9

Item No.	Package Size	Metric	Quantity	UPC
1240-11	10 lb pail	4.5 kg	4/case	0-39645-12413-0
1240-20	20 lb pail	9.1 kg	60/pallet	0-39645-12404-8
1240-50	50 lb. bag	22.6 kg	64/pallet	0-39645-12405-5



ANCHORING CEMENT - EXTERIOR USE

A pourable rapid setting expansive cement that develops strength greater than concrete. Sets in 10 to 30 minutes. Expands as it hardens to fill voids and lock itself securely into place. Suitable for wet environments.

Use For:

- Setting bolts, handrails, or anything metal to be anchored in concrete
- Ideal for repairing loose wrought iron railings
- Can be used for interior or exterior applications

Tested in Accordance with ASTM E 488

Item No.	Package Size	Metric	Quantity	UPC
1245-11	10 lb pail	4.5 kg	4/case	0-39645-12462-8
1245-20	20 lb pail	9.1 kg	60/pallet	0-39645-12452-9
1245-50	50 lb pail	22.6 kg	64/pallet	0-39645-12456-7



HYDRAULIC WATER-STOP CEMENT

Rapid setting, high strength repair material designed to plug leaks instantly in concrete and masonry. Sets in 3 to 5 minutes and can be used above and below grade.

Use For:

- Blocking running water or leaks in cracked masonry or concrete surfaces
- Can be used on swimming pools, foundations and for sealing around concrete pipe

Tested in Accordance with ASTM C 191

Item No.	Package Size	Metric	Quantity	UPC
1126-11	10 lb pail	4.5 kg	4/case	0-39645-11273-1
1126-20	20 lb pail	9.1 kg	60/pallet	0-39645-11262-5
1126-50	50 lb pail	18.1 kg	64/pallet	0-39645-11266-3
White				
1126-15	10 lb pail	4.5 kg	4/case	0-39645-11279-3

1977



January 1977
Introduces **QUIKWALL**[®]
Surface Bonding Cement



May 1980 Introduces color-coded pails
for **QUIKRETE**[®] Repair Products





POLYMER MODIFIED STRUCTURAL REPAIR

Polymer modified structural repair is a polymer modified and shrinkage-compensated rapid setting, high strength repair material designed for vertical and horizontal structural concrete repairs. 20 to 45 minute set time. Exceeds 2500 PSI (17.2 MPa) in 3 hours.

Use For:

- Partial-depth repairs and can be sculpted to match the contour of existing concrete surfaces.
- Full-depth repairs and can be extended with up to 10 lb (4.5 kg) of clean 1/2 in (13 mm) gravel.

Exceeds the requirements of ASTM C 928 R2

Item No.	Package Size	Metric	Quantity	UPC
1241-25	20 lb pail	1.36 kg	12/case	0-39645-12438-3
1241-58	50 lb bag	22.6 kg	63/pallet	0-39645-12439-0



ZIP & MIX - REPAIR MORTAR

Polymer modified fast-setting repair mortar in a new zip closure pouch. Add water directly to the pouch, zip the pouch closed and knead the bag for 3 minutes, then apply right out of the pouch.

Use For:

- Vertical or horizontal repairs to concrete and masonry surfaces from 1/8 in to 2 in thick.

Item No.	Package Size	Metric	Quantity	UPC
1241-15	3 lb bag	1.36 kg	12/case	0-39645-12428-4



CONCRETE PATCHING COMPOUND

Pre-mixed, ready to apply, acrylic patching compound for non-structural repairs to concrete and masonry surfaces. Use for patches up to 1/4 in thick. No mixing required.

Use for:

- Sidewalks
- Steps
- Walkways
- Patios

Item No.	Package Size	Metric	Quantity	UPC
8650-35	1 qt pail	.95 L	12/case	0-39645-86502-6



HEAVY DUTY MASONRY COATING

A powdered mixture of Portland cement, waterproofing agents and sand used to seal and beautify concrete, block, brick, stucco, and stone walls. Can be used in both interior and exterior applications both above grade and below. Available in white and gray.

Use For:

- Basement walls
- Ponds
- Retaining walls
- Swimming pools

Item No.	Package Size	Metric	Quantity	UPC
White				
2401-20	20 lb pail	9.1 kg	60/pallet	0-39645-24012-0
1301-40	40 lb bag	18.1 kg	63/pallet	0-39645-13004-9
Gray				
2402-20	20 lb pail	9.1 kg	60/pallet	0-39645-24022-9
1312-40	40 lb bag	18.1 kg	63/pallet	0-39645-13124-4

1981



30th Plant

April 1981 Relocates corporate headquarters to Atlanta; Jim, Jack and Dennis Winchester assume leadership of company



June 1982 Publishes first **QUIKRETE® Profit Manual**





CONCRETE CRACK SEAL

A uniformly blended latex emulsion, specially designed to adhere to all concrete surfaces. No mixing is required. Just pour from the bottle. Blends in with the natural color of concrete.

Use For:

- Repairing cracks in concrete sidewalks, patios and driveways

Item No.	Package Size	Metric	Quantity	UPC
8640-15	5.5 oz tube	163 mL	12/case	0-39645-86409-8
8640-00	1 qt bottle	946 mL	12/case	0-39645-86400-5
8640-01	1 gal bottle	3.8 L	4/case	0-39645-86401-2



ACRYLIC CONCRETE REPAIR

A weather-resistant, sanded acrylic and flexible crack-filler and sealer. Helps prevent water and ice damage to concrete & masonry surfaces. Dries to a textured finish to blend with surrounding surface. Apply with standard caulking gun for 10 oz size.

Use For:

- Repairing cracks in concrete, masonry and stucco
- Ideal for vertical surfaces

Item No.	Package Size	Metric	Quantity	UPC
8620-13	5.5 fl oz tube	163 mL	12/case	0-39645-86201-8
8620-10	10 fl oz tube	296 mL	12/case	0-39645-86200-1



FASTSET™ CONCRETE CRACK REPAIR

A rapid curing, two-part hybrid polyurethane crack repair in a single cartridge. The specially formulated self-leveling low viscosity material penetrates deep into cracks for a superior bond that can be opened to traffic in one hour at 77 °F (25 °C). Suitable for repairs from hairline up to 1 in (25 mm).

Use For:

- Driveways
- Sidewalks
- Bridge Decks
- Garage Floors
- Basement Floors
- Warehouse floors

Item No.	Package Size	Metric	Quantity	UPC
8650-69	8.6 fl oz tube	296 mL	12/case	0-39645-86507-1



ACRYLIC MORTAR REPAIR

A sanded acrylic formula that adheres to brick, block, stone and concrete surfaces. Texture and color blends with the surrounding mortar. On the 10 oz caulk tube the square applicator tip is designed to smooth mortar joints.

Use For:

- Tuck-pointing and sealing mortar joints

Item No.	Package Size	Metric	Quantity	UPC
8620-05	5.5 fl oz tube	163 mL	12/case	0-39645-86202-5
8620-09	10 fl oz tube	296 mL	12/case	0-39645-86002-1



ACRYLIC STUCCO REPAIR

Fills and seals cracks in stucco up to 1/2 in (12 mm) wide. Weather resistant formula provides excellent adhesion and flexibility. Sanded acrylic formula blends with the texture of the surrounding stucco surface.

Use For:

- Vertical or horizontal stucco repair applications

Item No.	Package Size	Metric	Quantity	UPC
8650-05	5.5 fl oz tube	163 mL	12/case	0-39645-86500-2
8650-10	10 fl oz tube	296 mL	12/case	0-39645-86501-9



FIREPLACE REPAIR MORTAR

A silicate based refractory cement caulk for tuck-pointing damaged fireplace mortar joints and repairing cracked or chipped firebricks in fireplaces and wood-burning stoves. It provides superior adhesion and withstands temperatures of 2000 °F (1093 °C).

Use For:

- Tuck-pointing damaged fireplace mortar joints and repairing cracked or chipped firebricks

Meets the requirements of ASTM E 136

Item No.	Package Size	Metric	Quantity	UPC
8620-21	10 fl oz tube	296 mL	12/case	0-39645-86206-3

1984



40th Plant

August 1985

Secures Don Knotts as spokesperson.
Publishes *Build & Repair With Concrete*



January 1988 Introduces
Fast-Setting Concrete Mix





ADVANCED POLYMER SELF-LEVELING SEALANT

High-performance, commercial-grade material that permanently seals horizontal cracks and expansion joints in concrete with smooth, level, tack-free finish in 60 minutes. Meets ASTM C920 standards.

Use For:

- Sealing expansion joints in concrete slabs
- Sealing cracks in concrete floors, driveways, patios, steps, basements and pool decks



ADVANCED POLYMER NON-SAG SEALANT

High-performance, commercial-grade material that permanently seals vertical cracks and expansion joints in concrete, masonry, stucco and brick with smooth, tack-free finish in 20 minutes. Meets ASTM C920 standards.

Use For:

- Expansion joints in concrete wall panels and stucco walls
- Sealing around window and door openings
- Sealing cracks in concrete, stucco and masonry surfaces



ADVANCED POLYMER CONSTRUCTION ADHESIVE

High-performance, commercial-grade material that permanently bonds concrete, masonry, brick, veneer stone, foamboard, drywall, wood and plastic in minutes. Meets ASTM C920 standards.

Use For:

- Repairing broken concrete
- Bonding retaining wall block and caps



ADVANCED POLYMER CONCRETE CRACK SEALANT

High-performance, commercial-grade material that permanently seals and waterproofs cracks in concrete with textured matte finish. Meets ASTM C920 standards.



ADVANCED POLYMER MORTAR JOINT SEALANT

High-performance, commercial-grade material that permanently seals and waterproofs mortar joints with a textured matte finish. Meets ASTM C920 standards.



BACKER ROD

Foam rope used to partially fill large cracks, gaps and joints before applying sealant. Use for horizontal and vertical applications. Available in 3/4 in diameter in 20 foot lengths.

Item No.	Package Size	Metric	Quantity	UPC
Gray				
8660-10	10 oz tube	300 mL	6/case	0-39645-86601-3
8660-30	29 oz tube	858 mL	6/case	0-39645-86603-0
Sandstone				
1317-02	29 oz tube	858 mL	6/case	0-39645-86604-7

Item No.	Package Size	Metric	Quantity	UPC
8660-11	10 oz tube	300 mL	6/case	0-39645-86602-3


Item No.	Package Size	Metric	Quantity	UPC
9902-10	10 oz tube	300 mL	6/case	0-39645-99034-6

Item No.	Package Size	Metric	Quantity	UPC
8620-17	10 oz tube	300 mL	6/case	0-39645-86212-4

Item No.	Package Size	Metric	Quantity	UPC
8620-18	10 oz tube	300 mL	6/case	0-39645-86213-1

Item No.	Package Size	Metric	Quantity	UPC
6917-42	3/4 in diameter 20 ft long	19.1 mm x 6 M	12/case	0-39645-69175-5

March 1988 Runs first national TV ads with Don Knotts featuring Fast-Setting Concrete and The **QUIKRETE**® Concrete Repair Center



April 1988 Launches The Great Rebate National Promotion featuring **QUIKRETE**® Vinyl Concrete Patcher



December 1989 Introduces Gray Concrete Crack Seal & Fiber Reinforced Concrete Mix



EPOXY ANCHORING & EPOXY CONCRETE REPAIR



FASTSET™ ANCHORING EPOXY

Fast setting, two part component structural epoxy with a working time of 4 to 5 minutes. Non-sag, solvent-free, low odor formula.

Use For:

- Anchoring bolts, threaded rods, tie bars and rebar dowels into concrete and masonry substrates.
- Horizontal and vertical applications.

Item No.	Package Size	Metric	Quantity	UPC
8620-30	8.6 fl oz tube	255 mL	12/case	0-39645-86210-0



HIGH-STRENGTH ANCHORING EPOXY

High strength, two component structural epoxy with an extended working time of 15 minutes. Formulated to allow for adequate placement time. Non-sag, solvent-free, low odor formula.

Use For:

- Heavy duty applications.
- Anchoring bolts, threaded rods, tie bars and rebar dowels into concrete and masonry substrates.
- Horizontal applications.

Item No.	Package Size	Metric	Quantity	UPC
8620-31	8.6 fl oz tube	255 mL	12/case	0-39645-86211-7



EPOXY CONCRETE REPAIR

A multi-purpose, rapid cure, two component epoxy bonding and repair adhesive suitable for cracks, holes, breaks and spalls. It's non-sag property makes it suitable for vertical and horizontal repairs.

Use For Concrete & Masonry:

- Concrete
- Stucco
- Brick
- Tile
- Stone
- Concrete block
- Other substances

Item No.	Package Size	Metric	Quantity	UPC
8620-49	8.6 fl oz tube	255 mL	12/case	0-39645-86223-0

EPOXY ANCHORING & EPOXY CONCRETE REPAIR



May 1990
Celebrates
50th Anniversary



1992



50th Plant

January 1992 Introduces
QUIKRETE® 5000, Mason Mix
& WALKMAKER





CLEANER, ETCHER & DEGREASER

Surface preparation treatment for use prior to repairing, sealing or staining concrete, paver and masonry surfaces

- Degreases, cleans oil and etches the surface
- Significantly improves adhesion of coatings and repair materials
- Concentrated formula
- Solvent-free, Low odor and Low VOC

Item No.	Package Size	Metric	Quantity	UPC
8675-34	1 gal	3.8 L	4/case	0-39645-86754-9



OIL STAIN REMOVER

Removes oil stains and grease from concrete, paver and masonry surfaces.

- Heavy duty cleaner
- Solvent-free formula
- Ideal for use on concrete, garage floors, driveways and patios
- Low odor and Low VOC

Item No.	Package Size	Metric	Quantity	UPC
8670-06	1 gal	3.8 L	4/case	0-39645-86700-6



EFFLORESCENCE & RUST REMOVER

Removes efflorescence salts, rust and hard water deposits from horizontal and vertical concrete, pavers, brick, masonry and stucco

- Use to remove efflorescence, rust and other stains from surface
- Ideal for use on concrete or paver patios and walkways, and masonry or stucco walls
- Renews concrete, masonry and paver surfaces
- No scrubbing required

Item No.	Package Size	Metric	Quantity	UPC
8675-33	1 gal	3.8 L	4/case	0-39645-86753-2



CONCRETE & ASPHALT CLEANER - CONCENTRATE

A multi-purpose cleaner that is safe to use on any hard surface where water can be used. Use prior to any repair project to achieve the strongest bond. Non-toxic, non-flammable and contains no acid.

Use For:

- Removing soil, grease, oil, etc. from all types of masonry, stucco concrete, mortar and grout

Item No.	Package Size	Metric	Quantity	UPC
8601-14	1 qt bottle	946 mL	12/case	0-39645-86011-3

January 1993
Introduces **QUIKRETE®**
1-800 consumer hotline



January 1994 Introduces
Liquid Cement Colors



October 1994 Introduces
Concrete Project Instruction Center





PREMIUM CONCRETE BONDING ADHESIVE

Permanently bonds new concrete, plaster and stucco to existing concrete, plaster or stucco. Eliminates the need for roughening the surface before application.

Use For:

- Bonding applications on concrete overlays 1 in or thicker
- Interior and exterior applications

Meets the performance requirements of ASTM C 1059 Type I & II

Item No.	Package Size	Metric	Quantity	UPC
9902-14	1 qt bottle	946 mL	12/case	0-39645-99021-6
9902-01	1 gal bottle	3.8 L	4/case	0-39645-99022-3
9902-05	5 gal pail	18.9 L	36/pallet	0-39645-99025-4



CONCRETE ACRYLIC FORTIFIER

Acrylic resin admixture designed to enhance bonding and water resistance of concrete patching materials, stucco, surface bonding cement, thin-set mortars and tile grouts.

Use To:

- Improve bonding to existing surfaces
- Eliminate moist curing in most circumstances
- Reduce permeability

Meets the requirements of ASTM C 1438

Item No.	Package Size	Metric	Quantity	UPC
8610-14	1 qt bottle	946 mL	12/case	0-39645-86101-1
8610-01	1 gal bottle	3.8 L	4/case	0-39645-86102-8
8610-05	5 gal pail	18.9 L	36/pallet	0-39645-86105-9



CONCRETE & MASONRY WATERPROOFING SEALER - NATURAL LOOK

Water-based, penetrating, silane/siloxane sealer waterproofs and protects concrete, brick, masonry, pavers and stucco surfaces. Clear sealer does not change the surface appearance. Seals from water, salts and oils. UV Resistant. Interior or exterior use. Wait 30 days before applying to new concrete surfaces.

Use For Sealing:

- Driveways
- Patios
- Stucco
- Block
- Walls
- Sidewalks
- Pavers
- Steps
- Floors
- Bricks

Item No.	Package Size	Metric	Quantity	UPC
8800-05	1 gal bottle	3.8 L	4/case	0-39645-88003-6
8800-07	5 gal pail	18.9 L	36/pallet	0-39645-88007-4



CONCRETE & MASONRY HIGH GLOSS SEALER - WET LOOK

Water-based siliconized-acrylic clear sealer waterproofs, protects and enhances the color of concrete, masonry, brick, paver and natural stone surfaces. Seals from acids, grease, food stains, oil, salt and more. UV resistant. Interior or exterior use. Wait 30 days before applying to new concrete surfaces.

Use For Sealing:

- Decorative concrete
- Exposed Aggregate
- Floors
- Pavers
- Brick
- Steps
- Natural Stone
- Stucco

Item No.	Package Size	Metric	Quantity	UPC
8800-06	1 gal bottle	3.8 L	4/case	0-39645-88004-3
8800-08	5 gal pail	18.9 L	36/pallet	0-39645-88008-1



ACRYLIC CONCRETE CURE & SEAL - SATIN FINISH

Water-based, clear acrylic coating cures freshly placed concrete and seals concrete and masonry surfaces.

Features and Benefits include:

- Eliminates the need for water curing freshly placed concrete.
- Protects and seals from acids, grease, oils, food stains, salt and more.

Meets the requirements of ASTM C 309

Item No.	Package Size	Metric	Quantity	UPC
8730-02	1 gal bottle	3.8 L	4/case	0-39645-87300-7
8730-03	5 gal pail	18.9 L	36/pallet	0-39645-87302-1

November 1984 Introduces **QUIKRETE®** Interactive Video Answer Center



1995



60th Plant

January 1995 Introduces Acrylic Concrete Cure & Seal



January 1997 Launches first website




LIQUID CEMENT COLORS

Mix with water and then add to dry concrete mix. One bottle will mix with two 80 lb or 60 lb bags of Concrete Mix. Available in Red, Brown, Buff, Charcoal and Terra Cotta.

Use For:

- Adding color to WalkMaker projects
- Adding color to any concrete, mortar, sand topping or stucco project
- Provides permanent integral color

Meets the requirements of ASTM C 979



Item No.	Package Size	Metric	Quantity	UPC
Charcoal				
1317-00	10 oz bottle	296 mL	6/case	0-39645-13170-1
Brown				
1317-01	10 oz bottle	296 mL	6/case	0-39645-13171-8
Buff				
1317-02	10 oz bottle	296 mL	6/case	0-39645-13172-5
Red				
1317-03	10 oz bottle	296 mL	6/case	0-39645-13173-2
Terra Cotta				
1317-04	10 oz bottle	296 mL	6/case	0-39645-13174-9

CONCRETE MIX ACCELERATOR

Add to concrete mix for faster set time. Use one to two boxes of accelerator per 60 lb (27.2 kg) bag of concrete mix.

Use For:

- Fence and lamp post
- Piers
- Curbs
- Swing sets
- Basketball backboards



Item No.	Package Size	Metric	Quantity	UPC
9800-01	1.5 lb carton	.68 kg	24/case	0-39645-98000-2

THERMO-LUBE®

Winter admixture. Reduces the time that the fresh concrete or mortar needs to be protected from freezing. Reduces set time and improves initial strength gain.

Use In:

- Concrete and mortar in cold weather



Item No.	Package Size	Metric	Quantity	UPC
1905-01	1 gal bottle	3.8 L	4/case	0-39645-19051-7
1905-05	5 gal pail	18.9 L	36/pallet	0-39645-19055-5

January 1998 Introduces Commercial Grade Products



1998



70th Plant

January 2001 Introduces Concrete Resurfacer





FASTSET CONCRETE MIX

A rapid hardening concrete mix designed with a 20 to 30 minute set time, allowing for mixing, pouring and finishing. Use at any thickness from 1-1/2 in to 24 in.

Use To Build or Repair:

- Street repairs
- Concrete floors
- Concrete parking lots
- Bridge decks
- Highways
- Sidewalks

Compressive Strength ASTM C 39

3 Hours	3000 PSI	20.7 MPa
24 Hours	5000 PSI	34.5 MPa
7 Days	6000 PSI	41.3 MPa
28 Days	7000 PSI	48.3 MPa

Exceeds the requirements of ASTM C 928 R-3

Item No.	Package Size	Metric	Quantity	UPC
1004-51	70 lb bag	31.7 kg	42/pallet	0-39645-60361-1



FASTSET REPAIR MORTAR

A low-sag repair mortar formula. Ideal for vertical & overhead repairs. 20 to 30 minute working time & unique properties allow sculpting of the material during placement.

Use For Repairing:

- Pre-stress panels
- Loading docks
- Retaining walls
- Bridge columns
- Tunnels
- Curbs/steps

Compressive Strength ASTM C 109 Modified

3 Hours	2000 PSI	13.8 MPa
24 Hours	4000 PSI	27.6 MPa
7 Days	5000 PSI	34.5 MPa
28 Days	6000 PSI	41.4 MPa

Exceeds the requirements of ASTM C 928 R-2

Item No.	Package Size	Metric	Quantity	UPC
1241-20	20 lb pail	9.1 kg	60/pallet	0-39645-12412-3
1241-50	50 lb pail	22.6 kg	each	0-39645-12419-2
1241-60	60 lb bag	27.2 kg	56/pallet	0-39645-60022-1



FASTSET NON-SHRINK GROUT

For structural concrete repairs from 1/4 in to 24 in deep. 30 minute set time, non shrink characteristics & rapid strength gain. Can be mixed to a plastic, flowable or fluid consistency.

Use For Anchoring & Grouting:

- Anchor bolts
- Floor leveling
- Steel column bases
- Pre-cast concrete keyways
- Bearing plates

Compressive Strength ASTM C 109

Time	Fluid	Flowable	Plastic
3 Hours	2000 PSI (13.8 MPa)	2500 PSI (17.2 MPa)	3000 PSI (20.7 MPa)
24 Hours	4000 PSI (27.6 MPa)	4500 PSI (31.0 MPa)	5000 PSI (34.5 MPa)
7 Days	5000 PSI (34.5 MPa)	5500 PSI (37.9 MPa)	6000 PSI (41.3 MPa)
28 Days	6500 PSI (44.8 MPa)	7500 PSI (51.7 MPa)	8000 PSI (55.1 MPa)

Exceeds the requirements of ASTM C 928 R-3 and ASTM C 1107.

Item No.	Package Size	Metric	Quantity	UPC
1585-20	20 lb pail	9.1 kg	60/pallet	0-39645-15852-4
1585-50	50 lb pail	22.6 kg	each	0-39645-15851-7
1585-09	60 lb bag	27.2 kg	56/pallet	0-39645-60511-0



NON-SHRINK PRECISION GROUT

High strength, non-metallic, non-shrink grout designed for precision grouting and general construction applications. Can be mixed to a plastic, flowable or fluid consistency.

Use For:

- Grouting heavy equipment, pre-cast concrete, bearing plates, steel columns and anchoring applications

Compressive Strength at 28 Days

Plastic	14,000 PSI	96.5 MPa
Flowable	12,000 PSI	86.2 MPa
Fluid	8,000 PSI	55.2 MPa

Meets the requirements of ASTM C 1107 and Army Corp. of Engineers CRD 621

Item No.	Package Size	Metric	Quantity	UPC
1585-00	50 lb bag	22.6 kg	64/pallet	0-39645-15855-5
1585-00	50 lb bag	22.6 kg	35/mini pallet	0-39645-15855-5

January 2003 Introduces current **QUIKRETE®** logo & new packaging



CEMENT & CONCRETE PRODUCTS™

March 2003 Introduces project illustrations featured on product packaging



March 2005 Launches **QUIKRETE®** Origami TV Spot





NON-SHRINK GENERAL PURPOSE GROUT

High strength, non-metallic Portland cement based grout including expansive additives. Can be mixed to a plastic, flowable or fluid consistency.

Use For:

- Grouting, anchoring and general construction applications

Compressive Strength at 28 Days

Plastic	10000 PSI	68.9 MPa
Flowable	9000 PSI	62.1 MPa
Fluid	8000 PSI	55.2 MPa

Meets the requirements of ASTM C 1107 and Army Corp. of Engineers CRD 621, tested at 70°F

Item No.	Package Size	Metric	Quantity	UPC
1585-01	50 lb bag	22.6 kg	64/pallet	0-39645-15850-0



POLYMER MODIFIED FIBER-REINFORCED DECK MIX & FIBER-REINFORCED DECK MIX

Portland cement based, high-early strength 6000 PSI concrete mix. The fiber-reinforced and air-entrained formation provides improved freeze/thaw durability and crack resistance and contains an integral corrosion inhibitor.

Use for:

- Parking structures
- Loading docks
- Roads
- Bridge decks
- Balconies
- Industrial floors

Item No.	Package Size	Metric	Quantity	UPC
Poly-Mod				
1251-81	80 lb bag	36.2 kg	42/pallet	0-39645-12519-9
Fiber-Reinf				
1251-80	80 lb bag	36.2 kg	42/pallet	0-39645-12518-2



SHOTCRETE MS & SHOTCRETE MS-FIBER REINFORCED

Portland cement based structural repair material for making repairs to horizontal, vertical or overhead surfaces. The micro silica enhanced formulation provides high adhesion and very low rebound and permeability characteristics. Shotcrete MS is available in alkali-resistant fiberglass fiber, polypropylene fiber or steel fiber formulations.

Use For Construction and Repair:

- Tunnels
- Foundations
- Structural concrete line
- Slope stabilization
- Bridge columns & beams
- Walls

Also available in 3000 lb. bulk bags.

Achieves 9000 PSI (MPa) at 28 days when field applied

Item No.	Package Size	Metric	Quantity	UPC
1229-80	50 lb bag	22.6 kg	64/pallet	0-39645-12298-3
1229-81	80 lb bag	36.2 kg	42/pallet	0-39645-12289-1
Fiber-Reinf				
1228-51	50 lb bag	22.6 kg	64/pallet	0-39645-12286-0



FORM & POUR MS

Micro silica enhanced, high-flow, high-strength concrete mix designed for structural repairs to bridge, parking structures, tunnels, dams, concrete walls, industrial floors and filling voids in concrete. The material is air entrained (5% to 7%) and achieves a compressive strength of 6500 PSI when poured at a 7 in to 9 in slump and 8000 PSI when poured in a 4 in to 5 in slump.

Item No.	Package Size	Metric	Quantity
808100-65	80 lb bag	36.2 kg	42/pallet

January 2008 QUIKRETE®
Acquires Target Products- Enters
Canadian Market



March 2008 Introduces Concrete Patching
Compound, Countertop Mix & Crack Resistant Concrete Mix





FASTSET™ DOT MIX & FASTSET™ DOT MIX - EXTENDED

For structural concrete repair of bridge decks, roadways & parking decks from 1/2 in to 24 in (13 mm to 600 mm) thick. Can be extended with up to 25 lb (11.3 kg) of 3/8 in stone or gravel with a top size of up to 1/2 in (13 mm) for patches over 2 in (50 mm) thick. Achieves 3000 PSI (20.6 MPa) in 1 1/2 hours and 9000 PSI (62.0 MPa) in 28 days.

Use For Anchoring & Grouting:

- Structural concrete repair
- Roadways
- Bridge decks
- Parking deck applications

Exceeds the requirements of ASTM C 928 R-3
Exceeds DOT region 3 requirements for exposure to de-icing chemicals

Item No.	Package Size	Metric	Quantity	UPC
1244-56	55 lb bag	24.9 kg	64/pallet	0-39645-12415-4
Extended				
1244-80	80 lb bag	36.2 kg	42/pallet	0-39645-12447-5



FASTSET™ POLYMER MODIFIED DOT MIX

Fiber reinforced, rapid-setting, very high-strength repair material designed for structural concrete repairs. Can be extended with up to 25 lb (11.3 kg) of ASTM C 33 size number 8 aggregate with a top size of up to 1/2 in (13 mm) for patches over 2 in (50 mm) thick. Achieves 3000 PSI (20.6 MPa) at 1 1/2 hours and 9000 PSI (62.0 MPa) at 28 days.

Use For Anchoring & Grouting:

- Structural concrete repair
- Roadways
- Bridge decks
- Parking deck applications

Exceeds the requirements of ASTM C 928 R-3

Item No.	Package Size	Metric	Quantity	UPC
1244-54	55 lb bag	24.9 kg	64/pallet	0-39645-12415-4



RAPID ROAD REPAIR® & RAPID ROAD REPAIR® - EXTENDED

Fast-setting, rapid-hardening structural repair mortar, designed to make pavement repairs to concrete pavement. Alkali-resistant fiber reinforced for improved flexural performance. Exceeds 3000 PSI (20.6 MPa) at 1 hour and 8300 PSI (57.5 MPa) at 28 days.

Use For Repairing:

- Highways
- Concrete footings
- Bridge decks
- Parking garages
- Runways
- Driveways

Exceeds the requirements of ASTM C 928 R-3

Item No.	Package Size	Metric	Quantity	UPC
1242-51	50 lb bag	22.6 kg	64/pallet	0-39645-12420-8
Extended				
1242-80	80 lb bag	36.2 kg	42/pallet	0-39645-12427-7



RIP RAP - SCRIM

Commercial grade blend of Portland cement and specially graded sand, packaged in a fiber reinforced, biodegradable bag for erosion control applications. Requires no mixing or equipment to install. The free-form construction method also allows for the elimination of forming and finishing procedures and is ideal for remote and accessible locations.

Use For:

- Slopes
- Bulkheads
- Seawalls
- Lake fronts
- Riverbanks
- Embankments
- Revetment
- Culverts
- Beaches
- Dams
- Canals

* Rip Rap - Scrim Available Regionally

Item No.	Package Size	Quantity
1129-60	60 lb bag	56/pallet
1129-80	80 lb bag	42/pallet
SCRIM		
1134-80	80 lb bag	42/pallet
BURLAP		
1129-60	60 lb bag	56/pallet
POLY		
1129-62	60 lb bag	56/pallet

December 2008

Publishes Guide to Concrete Masonry & Stucco Products



January 2009 Introduces Base Coat Stucco - Pump Grade



November 2009

QUIKRETE® Acquires SpecMix





FAST-SETTING SELF-LEVELING FLOOR RESURFACER & SELF-LEVELING FLOOR RESURFACER

Self-finishing interior floor topping and underlayment specially formulated to produce a smooth surface ready for the installation of ceramic tile, resilient flooring or other finishes. No troweling required.

Use For:

- Resurfacing existing concrete floors with damaged finishes
- Over new concrete floors & pre-cast slabs w/unacceptable finishes

Fast-Setting formula exceeds: 1800 PSI (12.4 MPa) in 24 hours
4000 PSI (27.6 MPa) in 7 days
5500 PSI (37.9 MPa) in 28 days.

Regular formula exceeds: 1000 PSI (6.9 MPa) in 7 days
2000 PSI (13.8 MPa) in 28 days.

Item No.	Package Size	Metric	Quantity	UPC
Fast-Setting				
1249-51	50 lb bag	22.6 kg	64/pallet	0-39645-12491-8
Regular				
1249-50	50 lb bag	22.6 kg	64/pallet	0-39645-12495-6



FAST-SETTING UNDERLAYMENT

A rapid hardening, high strength, non-shrink, blend of gypsum cement and graded sand designed to level concrete and wood floors. Trowel applied.

Use For:

- Interior concrete and wood floors prior to the installation of ceramic tile, resilient flooring, carpet and other floor coverings

Meets the requirements of ANSI A 118-1

Item No.	Package Size	Metric	Quantity	UPC
1248-25	25 lb bag	11.3 kg	100/pallet	0-39645-12482-6



THIN SET SANDED & THIN SET SANDED - WHITE

A Portland cement based thin set for setting absorptive & non-absorptive tile on walls and floors. Addition of Acrylic Fortifier is recommended.

Apply Over:

- Plywood expanded metal lath
- Cementitious backer units
- Portland cement plaster
- Concrete
- Concrete block
- Wall board

Meets the requirements of ANSI A 118-1

Item No.	Package Size	Metric	Quantity	UPC
1547-50	50 lb bag	22.6 kg	63/pallet	0-39645-15475-5
White				
1547-51	50 lb bag	22.6 kg	63/pallet	0-39645-15476-2



MULTI-PURPOSE THIN SET

A polymer modified, Portland cement based thin set used for setting ceramic tile and natural stone such as marble or granite and saltillo tile on walls and floors. Requires no additional latex or fortifiers. Available in gray and white.

Apply Over:

- Plywood
- Cementitious backer units
- Portland cement plaster
- Concrete
- Concrete block
- Wall board

Meets the requirements of ANSI A 118-1 and ANSI A 118.4.

Item No.	Package Size	Metric	Quantity	UPC
Gray				
1550-49	50 lb bag	22.6 kg	63/pallet	0-39645-15505-9
White				
1550-50	50 lb bag	22.6 kg	63/pallet	0-39645-15506-6



FLOOR MUD

Portland cement based underlayment mortar designed for leveling travertine, slate and marble floor tile, and for shower pan applications.

Other Benefits and Features Include:

- Underlayment mortar, properly blended for leveling Travertine, Slate, Marble and Large Format Porcelain tiles.
- Offers low-sag to support heavy tiles.

Meets the requirements of ANSI A 108.1A, A 108.1B and A 108.1C

*Floor Mud Available Regionally

Item No.	Package Size	Quantity	UPC
1548-82	60 lb bag	56/pallet	0-39645-15488-5
1548-81	80 lb bag	42/pallet	0-39645-15487-8



WALL FLOAT

Portland cement based leveling mortar for vertical applications of tile, marble and brick veneer. Addition of Acrylic Fortifier or Premium Concrete Bonding Adhesive is recommended.

*Wall Float Available Regionally

Item No.	Package Size	Quantity	UPC
153-50	50 lb bag	65/pallet	0-39645-15350-5
153-76	75 lb bag	48/pallet	0-39645-15376-5

December 2009 Introduces
Hardscapes by **QUIKRETE®**



January 2010
Celebrates 70th
Anniversary with
Rose Parade Float



2010



90th Plant



LIGHTWEIGHT FIBERGLASS REINFORCED STUCCO

A fiber reinforced contractor grade pre-blended Portland cement based scratch and brown coat stucco mix.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application
- May be spray or trowel applied

Exceeds the requirements of ASTM C 926 for Portland cement based plaster

Item No.	Package Size	Metric	Quantity	UPC
1139-78	80 lb bag	36.2 kg	42/pallet	0-39645-11392-9



ONE COAT FIBERGLASS REINFORCED STUCCO

An alkali resistant fiberglass reinforced stucco designed for use in one-coat stucco applications. Available in a sanded version which requires the addition of clean plaster sand and water.

Features & Benefits include:

- Crack resistant formula
- 1 hour fire rating over plywood or OSB & EPS foam when applied in accordance with ICC ESR-1240
- Superior workability
- Extended board life

Item No.	Package Size	Metric	Quantity	UPC
Sanded				
1200-80	80 lb bag	36.2 kg	42/pallet	0-39645-12008-8
Concentrated				
1216-80	80 lb bag	36.2 kg	42/pallet	0-39645-12168-9
1216-93	90 lb bag	40.8 kg	35/pallet	0-39645-21693-4



BASE COAT STUCCO

A Portland cement based stucco used for construction and repair of stucco walls.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application
- Superior workability

Meets the requirements of ASTM C 926 for cement based plaster

Item No.	Package Size	Metric	Quantity	UPC
1139-81	50 lb bag	22.6 kg	56/pallet	0-39645-11395-0
1139-80	80 lb bag	36.2 kg	42/pallet	0-39645-11398-1
Ext. Board				
1139-87	80 lb bag	36.2 kg	42/pallet	0-39645-11397-4



BASE COAT STUCCO-PUMP GRADE

A fiber reinforced contractor grade pre-blended Portland cement based scratch and brown coat stucco mix.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application
- May be spray or trowel applied

Exceeds the requirements of ASTM C 926 for Portland cement based plaster

Item No.	Package Size	Metric	Quantity	UPC
1139-86	80 lb bag	36.2 kg	42/pallet	0-39645-11393-6



BASE COAT STUCCO with WATER-STOP

An exterior stucco with Water-Stop additive, used for the construction and repair of stucco walls. The Water-Stop, waterproofing additive prevents moisture penetration from wind driven rain.

Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application

Meets the requirements of ASTM C 926 requirements for cement based plaster.

** Base Coat Stucco with Water-Stop Available Regionally*

Item No.	Package Size	Metric	Quantity	UPC
1139-89	80 lb bag	36.2 kg	42/pallet	0-39645-11399-8

May 2010 Launches Red-Bag Origami TV Spot



January 2011 Introduces full-color graphic Repair Product Packaging



June 2011 Introduces project how-to videos, and establishes social media presence on Facebook & Twitter





FINISH COAT STUCCO

A stucco finishing plaster designed for use as a color and texture coat over Portland cement base coat or QUIKRETE® Fiberglass Reinforced Stucco. Requires only the addition of water. Available in white or gray. Color can be added using QUIKRETE® Stucco & Mortar Color.

Use For:

- A decorative color and texture finish coat for stucco
- 90 lb (40.5 kg) Finish Coat Stucco Available Regionally*

Item No.	Package Size	Metric	Quantity	UPC
White				
1201-80	80 lb bag	36.2 kg	42/pallet	0-39645-12018-7
1201-80	80 lb bag	36.2 kg	24/mini pallet	0-39645-12018-7
1201-91	90 lb bag	40.8 kg	35/pallet	0-39645-12026-2
Gray				
1202-80	80 lb bag	36.2 kg	42/pallet	0-39645-12028-6
1202-80	80 lb bag	36.2 kg	24/mini pallet	0-39645-12028-6
1201-92	90 lb bag	40.8 kg	35/pallet	0-39645-12027-9



QUIKWALL® SURFACE BONDING CEMENT

An alkali resistant fiberglass reinforced, Portland cement based surface bonding cement used for construction of dry-stack (without mortar) cement block walls. Add color with QUIKRETE® Stucco & Mortar Color.

Use For:

- Waterproofing and strengthening block walls without mortar
- Rehabilitating existing walls with a water-resistant & decorative coating
- Construction of structural and non-structural walls

Meets the requirements of ASTM C 887

Item No.	Package Size	Metric	Quantity	UPC
White				
1230-50	50 lb bag	22.6 kg	64/pallet	0-39645-12305-8
1230-50	50 lb bag	22.6 kg	35/mini pallet	0-39645-12305-8
Gray				
1231-50	50 lb bag	22.6 kg	64/pallet	0-39645-12315-7
1231-50	50 lb bag	22.6 kg	35/mini pallet	0-39645-12315-7
Unsanded				
1220-50	50 lb bag	22.6 kg	64/pallet	0-39645-12205-1



FASTSET™ STUCCO PATCH

Fast setting, polymer modified, Portland cement-based stucco patching material formulated to provide water repellency, minimal shrinkage and improved durability.

- Apply fine finish to full-depth stucco repairs
- 20 to 30 minute working time
- Can be painted after 90 minutes

Meets requirements of ASTM C 926

Item No.	Package Size	Metric	Quantity	UPC
1139-92	20 lb pail	9.1 kg	60/pallet	0-39645-11400-1



PRE-MIXED STUCCO PATCH

Ready-to-use acrylic latex formula for making repairs to cracks, breaks and holes up to ¼ in thick in stucco surfaces.

- Dries to a durable and flexible finish
- Sanded formula blends with the texture of surrounding stucco

Item No.	Package Size	Metric	Quantity	UPC
8650-32	1 qt pail	.95 L	24/case	0-39645-86503-3

January 2012 Introduces polyurethane sealants, Zip & Mix™ Repair Mortar & anchoring epoxies



January 2012 QUIKRETE® Acquires Pavestone- Enters Walls, Pavers & Slabs Market



September 2013 QUIKRETE® Acquires Custom Building Products- Enters Tile Installation Products Market





PREMIUM PLAY SAND®

Specially graded fine sand that has been washed, dried and screened.

Use For:

- Children's sand boxes
- Molding and building

Item No.	Package Size	Metric	Quantity	UPC
1113-51	50 lb bag	22.6 kg	56/pallet	0-39645-11135-2



ALL-PURPOSE SAND

Washed, properly graded coarse sand with multiple uses. Color varies by market.

Use For:

- Underlayment for brick pavers and flagstone
- Increasing traction on snow and ice
- Mixing with potting soil or for use in other garden applications
- Mixing with Portland cement and gravel to make concrete mix

Meets ASTM C 33 specifications

Item No.	Package Size	Metric	Quantity	UPC
1152-51	50 lb bag	22.6 kg	56/pallet	0-39645-11525-1
1152-70	70 lb bag	31.7 kg	42/pallet	0-39645-11527-5
Poly-woven				
1152-60	60 lb bag	27.2 kg	56/pallet	0-39645-11523-7



ALL-PURPOSE GRAVEL

Multi-use product for a variety of decorative and landscaping applications. Also for making concrete. Washed, properly graded gravel. Color varies by market.

Use For:

- Landscaping, gardening, patios, tree wells, walks, rooftops, fish ponds and aquariums
- Mix with Portland cement & all purpose sand to make concrete mix

Meets ASTM C 33 specifications.

Item No.	Package Size	Metric	Quantity	UPC
1151-50	50 lb bag	22.6 kg	56/pallet	0-39645-11515-2



POWERLOC® JOINTING SAND

A polymer-modified graded sand for filling between interlocking pavers, brick, patio blocks and concrete slabs up to 1/2" (12.7 mm) wide. Once swept into the paver joints & dampened with a water mist it hardens, locking pavers into place. Also available in a dark color.

Features & Benefits Include:

- Resists erosion
- Stabilizes pavers
- Non-staining
- Contains safe organic binder
- Resists weed growth & insects
- Environmentally friendly

Item No.	Package Size	Metric	Quantity	UPC
1150-47	50 lb bag	22.6 kg	56/pallet	0-39645-11502-2
Dark				
1150-37	50 lb bag	22.6 kg	56/pallet	0-39645-11501-5



PATIO PAVER BASE SAND

Underlayment base sand used to provide a firm, stable base, for interlocking pavers, flagstone, brick and patio block.

Use For:

- Driveways
- Walkways
- Patios

Item No.	Package Size	Metric	Quantity	UPC
1150-49	50 lb bag	22.6 kg	56/pallet	0-39645-11504-6



PATIO PAVER JOINTING SAND

Properly graded fine sand for filling joints between interlocking pavers, flagstone, brick & patio block.

Use For:

- Driveways
- Walkways
- Patios

Item No.	Package Size	Metric	Quantity	UPC
1150-59	50 lb bag	22.6 kg	56/pallet	0-39645-11508-4



COMMERCIAL GRADE SAND

Consistently graded washed and kiln dried sand with multiple industrial and construction applications.

Use For:

- Underlayment for brick pavers and flagstone
- Epoxy and industrial coatings
- Specialized cement mixes

Item No.	Package Size	Metric	Quantity	UPC
Fine				
1961-52	50 lb bag	22.6 kg	56/pallet	0-39645-96152-0
1961-02	100 lb bag	45.4 kg	30/pallet	0-39645-96102-5
Medium				
1962-51	50 lb bag	22.6 kg	56/pallet	0-39645-96251-0
1962-01	100 lb bag	45.4 kg	30/pallet	0-39645-96201-5
Coarse				
1963-03	50 lb bag	22.6 kg	56/pallet	0-39645-96303-6
1963-01	100 lb bag	45.4 kg	30/pallet	0-39645-96301-2

February 2015

Introduces
Q-MAX PRO
Concrete Mix



March 2015 Introduces

QUIKRETE®
Mobile App



December 2015

Introduces New Products

- Polymer Modified Structural Repair
- FastSet™ Stucco Patch
- Epoxy Concrete Repair
- FastSet™ Concrete Crack Repair





POOL FILTER SAND

Properly graded clean silica sand.

Use For:

- Swimming pool filtration systems
- 20/40 gradation

Item No.	Package Size	Metric	Quantity	UPC
1153-50	50 lb bag	22.6 kg	56/pallet	0-39645-11535-0



MASON SAND

A washed, properly graded, fine masonry sand.

Use For:

- Mix with QUIKRETE® Portland Cement & Hydrated Lime or QUIKRETE® Masonry Cement to make Mortar Mix
- Fill joints between patio pavers, bricks or stone
- Mix with potting soil or use for other garden applications

Item No.	Package Size	Metric	Quantity	UPC
1961-56	50 lb bag	22.6 kg	56/pallet	0-39645-19525-3



WASHED PLASTER SAND

A washed, properly graded, coarse plaster sand.

Use For:

- Mix with QUIKRETE® Portland Cement & Hydrated Lime - Type S or with QUIKRETE® Plastic Cement to make Base Coat Stucco
- Mix with potting soil or use for other garden applications

*Meets ASTM C 897 specifications
Contains approx. 1/2 cu. ft. (14.2 L) of sand by volume*

Item No.	Package Size	Metric	Quantity	UPC
1152-58	50 lb bag	22.6 kg	56/pallet	0-39645-11529-9



ATHLETIC FIELD MARKER

Pulverized white limestone or marble used for marking athletic fields.

Item No.	Package Size	Metric	Quantity	UPC
1954-00	50 lb bag	22.6 kg	56/pallet	0-39645-19540-6

LIME PRODUCTS



HYDRATED LIME - TYPE S

For use in building construction. Can be mixed with Portland cement and other ingredients to make mortar mix and base coat stucco.

Meets the requirements of ASTM C 207, Type S Hydrated Lime for masonry purposes

Item No.	Package Size	Metric	Quantity
9907-53	50 lb. ba	22.6 kg	50/pallet



AGRICULTURAL LIME

Calcium Carbonate used to neutralize soil acidity
Available Regionally

Item No.	Package Size	Metric	Quantity
1111-50	50 lb bag	22.6 kg	56/pallet


November 2016 QUIKRETE®
Acquires Contech® - Enters CMP, Stormwater, Metal Bridge Structures & Infrastructures Market



January 2017 QUIKRETE®
Acquires Rinker Materials - Enters Concrete Pipe & Box Culvert Markets



April 2018 Introduces New Products



- Re-Cap Concrete Resurfacer
- Advanced Polymer Sealants
- Lightweight Fiberglass Reinforced Stucco

HardScapes

by **QUIKRETE**

STONES, PEBBLES & ROCK



STONES, PEBBLES & ROCK

Stone, pebbles and rocks for landscaping.

Use For:

- Controlling erosion
- Resisting decay
- Decorative features

Packaging Elements:

- Quantity Calculators
- Bilingual
- Product Descriptions
- Heavy Duty Bags
- Size 0.5 ft³
- UV Resistant

Rock Varieties:

- Red Lava Rock
- Pond Pebbles
- Marble Chips
- River Pebbles
- Crushed Rock
- All-Purpose Stone
- Pea Pebbles

Item No.	Package Size	Metric	Quantity	UPC
Marble Chips 1175-00	0.5 ft ³	.014 m ³	63/pallet	0-39645-11750-7
Red Lava Rock 1175-05	0.5 ft ³	.014 m ³	63/pallet	0-39645-11751-4
Pea Pebbles 1175-10	0.5 ft ³	.014 m ³	63/pallet	0-39645-11752-1
River Pebbles 1175-15	0.5 ft ³	.014 m ³	63/pallet	0-39645-11753-8
All-Purpose Stone 1175-20	0.5 ft ³	.014 m ³	63/pallet	0-39645-11754-5
Pond Pebbles 1175-25	0.5 ft ³	.014 m ³	63/pallet	0-39645-11755-2



POLYMERIC JOINTING SAND

A polymer-modified graded sand for filling joints up to 2 in wide between interlocking pavers, brick, natural stone and concrete slabs. Once swept into the paver joints & dampened with a water mist it hardens, locking pavers into place.

Features & Benefits Include:

- Resists erosion
- Resists weed growth & insects
- Commercial or Residential Use
- Stabilizes pavers

STABILIZING SAND

Item No.	Package Size	Metric	Quantity	UPC
1175-56	50 lb bag	22.6 kg	64/pallet	0-39645-11749-1



PAVER BASE

Paver base provides a firm, stable foundation for interlocking pavers, flagstone, bricks or patio block.

Use As a Base For:

- Pavers
- Concrete slabs
- Walkways



PAVER SAND

A properly graded fine sand used to fill joints between interlocking pavers, flagstone, bricks or patio block.

Use For:

- Patios
- Walkways
- Driveways



PLAY SAND

Specially graded washed sand.

Ideal For:

- Childrens' sand boxes
- Molding
- Safe surface for playground



ALL-PURPOSE SAND

Washed, properly graded coarse sand with multiple uses including, paver underlayment, soil and garden applications and mixing with cement.

Ideal For:

- Pavers
- Soil & garden
- Mixing with cement

SPECIALTY SANDS

Item No.	Package Size	Metric	Quantity	UPC
1175-45	0.5 ft ³	.014 m ³	63/pallet	0-39645-11759-0

Item No.	Package Size	Metric	Quantity	UPC
1175-40	0.5 ft ³	.014 m ³	63/pallet	0-39645-11758-3

Item No.	Package Size	Metric	Quantity	UPC
1175-50	0.5 ft ³	.014 m ³	63/pallet	0-39645-11760-6

Item No.	Package Size	Metric	Quantity	UPC
1175-35	0.5 ft ³	.014 m ³	63/pallet	0-39645-11757-6



COMMERCIAL GRADE PERMANENT BLACKTOP REPAIR

High performance asphalt cold patch specially formulated for permanent repairs to potholes and cracks over 1 inch (25 mm) wide in asphalt pavement. DOT Approved formula. Stays pliable in cold weather applications.

- Use all-year-round in wet or dry conditions
- Can be used in hot or cold weather
- Provides superior bond strength
- Does not require heating or mixing, pour directly out of bag
- Can be formed and compacted
- Patched area is ready for immediate use
- Very Low VOC formula - Meets all state requirements

Item No.	Package Size	Metric	Quantity	UPC
1701-59	50 lb bag	22.6 kg	63/pallet	0-39645-17015-1



ASPHALT COLD PATCH - 90% RECYCLED MATERIALS

High performance cold patch containing recycled materials and special binder additives. Environmentally friendly formula permanently bonds to surrounding asphalt pavement.

Available Regionally

Other Features & Benefits Include:

- No odor/very low VOC
- Repair area is ready for immediate use
- No heating or mixing required

Meets Air Quality Standards of AQMD Rule 1108

Item No.	Package Size	Metric	Quantity	UPC
1701-58	50 lb bag	22.6 kg	63/pallet	0-39645-17017-5



ACRYLIC BLACKTOP REPAIR

A weather-resistant crack-filler, provides excellent adhesion and minimal shrinkage. Helps prevent water and ice damage to blacktop surfaces. Dries to a textured black finish. Non-flammable.

Use For:

- Repairing cracks in blacktop and asphalt surfaces including driveways, roofs and chimney flashings

Item No.	Package Size	Metric	Quantity	UPC
8630-15	5.5 fl oz tube	163 mL	12/case	0-39645-86301-5
8630-10	10 fl oz tube	296 mL	12/case	0-39645-86300-8



BLACKTOP CRACK SEAL

A uniformly blended latex emulsion, specifically designed to adhere to asphalt and concrete surfaces. No mixing is required. Just pour from the bottle. Black color blends with surrounding surface.

Use For:

- Repairing cracks in blacktop and asphalt surfaces

Item No.	Package Size	Metric	Quantity	UPC
8640-05	1 qt	946 mL	12/case	0-39645-86405-0
8640-06	1 gal	3.8 L	4/case	0-39645-86406-7






QUIK-TUBE® BUILDING FORMS

Rigid fiber building form tube eliminates the need to build wood forms. Available regionally in 10 ft & 12 ft lengths.

Use For:

- Mailbox bases
- Deck supports
- Columns

Item No.	Package Size	Metric	Quantity	UPC
6922-01	8 in dia x 4 ft h	20 cm x 1.2 m	36/tray	0-39645-69221-9
6922-02	10 in dia x 4 ft h	25.4 cm x 1.2 m	24/tray	0-39645-69222-6
6922-03	12 in dia x 4 ft h	30.5 cm x 1.2 m	18/tray	0-39645-69223-3



EXPANSION JOINT STRIPS

Expansion joint filler made from resilient cane fibers used to prevent damage during expansion and contraction of concrete. Weather resistant.

Use for:

- Driveways, sidewalks and patios
- Between concrete slabs and to separate slabs from structures

Meets the requirements of ASTM D 1751

Item No.	Package Size	Metric	Quantity	UPC
6917-03	½ in x 4 in x 5 ft	12.7 mm x 1.5 m	40/carton	0-39645-69171-7
6917-04	½ in x 4 in x 10 ft	12.7 mm x 3 m	40/carton	0-39645-69173-1



WALKMAKER BUILDING FORM - COUNTRY STONE PATTERN

Reusable plastic mold in cobblestone pattern. Fill the mold with 80 lb of Concrete Mix, trowel, and remove the mold.

For best results, use QUIKRETE® Crack Resistant Concrete.


Use For:

- Creating cobblestone patterned paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color (No. 1317)

Available in:

Charcoal, Buff, Red, Brown, & Terra Cotta

Item No.	Package Size	Metric	Quantity	UPC
6921-32	2 ft x 2 ft	.6 m x .6 m	12/case	0-39645-69210-3



WALKMAKER BUILDING FORM -

- RUNNING BOND BRICK PATTERN
- EUROPEAN BLOCK PATTERN
- BASKET WEAVE PATTERN

Reusable plastic molds. Fill the mold with 80 lb of Concrete Mix, trowel, and remove the mold.

For best results, use QUIKRETE® Crack Resistant Concrete.

Use For:

- Creating brick patterned paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color (No. 1317)

Available in:

Charcoal, Buff, Red, Brown, & Terra Cotta

Item No.	Package Size	Metric	Quantity	UPC
Brick Bond 6921-33	2 ft x 2 ft	.6 m x .6 m	12/case	0-39645-69212-7
Euro Block 6921-34	2 ft x 2 ft	.6 m x .6 m	12/case	0-39645-69217-2
Brick Weave 6921-35	2 ft x 2 ft	.6 m x .6 m	12/case	0-39645-69230-1



GUIDE TO CONCRETE BOOK

The QUIKRETE® GUIDE TO CONCRETE book provides practical instructions and clear step-by-step photos to help accomplish the most popular projects and repairs made with concrete, masonry and stucco products.

Other Benefits and Features Include:

- Full color step-by-step project photography
- Detailed descriptions, quantity calculators and lists of tools and materials needed for projects
- At-a-glance project information
- Helpful hints & insight designed to make projects run smoothly from start to finish
- Free-standing counter display case

Item No.	Package Size	Quantity	UPC
6924-07	1 case	12/case	0-39645-69240-0





ROCK SALT - Graded Coarse Natural Salt

Use for:

- For melting ice and snow on stairs sidewalks, driveways, etc.

Item No.	Package Size	Metric	Quantity	UPC
9002-25	25 lb bag	11.3 kg	100/pallet	0-39645-90022-2
9002-50	50 lb bag	22.6 kg	56/pallet	0-39645-90025-3
9002-80	80 lb bag	36.2 kg	30/pallet	0-39645-90028-4



ICE DEVIL & ICE DEVIL EF

Ice Devil®

- Melts ice down to -10 °F (-23 °C)
- Blended for quick melting results
- Residential & commercial use
- Contains MgCL and NaCL

Ice Devil® EF

- Melts ice down to 0 °F (-18 °C)
- Safer on landscaping
- Easier on concrete surfaces
- Contains KCL, liquid MgCL, & NaCL
- Contains color tracker
- Non-staining and non-tracking

**Can be used before or during ice and snow storms to prevent excessive bonding of ice and snow to concrete or pavement*

Available Regionally

Item No.	Package Size	Metric	Quantity	UPC
9004-80	50 lb bag	22.6 kg	56/pallet	0-31187-02050-5
EF				
9004-79	25 lb bag	11.3 kg	56/pallet	0-39645-90074-5
9004-83	50 lb bag	22.6 kg	42/pallet	0-31187-02150-2



TRACTION SAND

A dry, coarse sand, ideal for traction on all surfaces in icy conditions.

Use For:

- Traction on icy and snow-covered surfaces
- Added vehicle weight

Item No.	Package Size	Metric	Quantity	UPC
1158-51	50 lb bag	22.6 kg	56/pallet	0-39645-11585-5



TUBE SAND

Tube-shaped bag fits along side rear axle, above wheel wells or in bed of pick-up trucks.

Use For:

- Traction and vehicle weight for winter driving conditions
- UV resistant woven-poly bag

Item No.	Package Size	Metric	Quantity	UPC
1159-60	60 lb bag	27.2 kg	42/pallet	0-39645-11596-1





What America's Made Of.®

The **QUIKRETE**® Company continues to add manufacturing locations to better serve you with high performance products. With more than 100 locations throughout The United States, Puerto Rico, Canada, Central and South America, The **QUIKRETE**® Company is unsurpassed in our ability to provide efficient and expedient delivery.

QUIKRETE®

CEMENT & CONCRETE PRODUCTS™

The **QUIKRETE**® Companies
 5 Concourse Parkway, Suite 1900
 Atlanta, GA 30328

1.800.282.5828

www.QUIKRETE.com

6943-99 (02/19)